

2016 Team Handbook

# Team America Rocketry Challenge



# Table of Contents

Team America Rocketry Challenge  
2016 Team Handbook  
Version 16.0.3 August 13, 2015



Introduction	2
Are you ready for the Challenge?	3
2016 TARC Rules	7
Key Points	14
Rocket Design	17
Rocket Construction	24
Rocket Flying	27
Qualifying and Practice Flights	31
Guidelines for Official NAR Observers	35
Vendors and Web Resources	41
Appendices	
1: Recommended Schedule of Team Activities	42
2: NAR Model Rocket Safety Code	46
3: List of TARC-Approved Model Rocket Motors	49
4: Tips for Parachutes	53
5: PerfectFlite Maximum Altitude Altimeters	55
6: TARC Outreach Program	58
7: Fund Raising	61
8: NAR Rocket-Flying Insurance FAQ	63
9: Past TARC Champions	67
10: Sport Rocketry: America's Safe, Educational Aerospace Hobby	68
11: Team America Mentor Volunteers	71

# Team America Rocketry Challenge

## 2016 Team Handbook

Aerospace Industries Association - National Association of Rocketry

The **Team America Rocketry Challenge (TARC)** is the world's largest rocket contest, sponsored by the **Aerospace Industries Association (AIA)** and the **National Association of Rocketry (NAR)**. It was created in the fall of 2002 as a one-time celebration recognizing the Centennial of Flight, but the enthusiasm about the event was so great that AIA and NAR were asked to hold the contest annually.

Over 4,000 students from across the nation compete in TARC each year. Teams design, build and fly a model rocket that reaches a specific altitude and duration determined by a set of rules developed each year. The contest is designed to encourage students to study math and science and pursue careers in aerospace.

The top 100 teams, based on local qualification flights, are invited to Washington, DC in May for the national Finals. Prizes include \$100,000 in cash and scholarships split among the top ten finishers plus \$5000 in prizes for special events, all sponsored by AIA member companies. In addition Raytheon Company sponsors a trip for the winning team to one of the big European air shows.

TARC is becoming bigger and better every year with the attendees and prizes growing annually. Register now to be a part of the excitement!



## Chapter 1

# Are you ready for the Challenge?

It may be one of the most daunting challenges you'll ever face during your school career, but you'll never forget the experience of planning, designing, building, and flying your own personal aerospace program with a team made up of friends who share your drive.

Are you ready to accept the Team America Rocketry Challenge?



# The Team America Rocketry Challenge



**The Team America Rocketry Challenge (TARC)** provides 7th through 12th grade students a realistic experience in designing a flying aerospace vehicle that meets a specified set of mission and performance requirements. Students work together in teams the same way aerospace engineers do. Over a period of several months, they experience the engineering process and compete through qualifying flights of their rockets with thousands of peers all across the country for the opportunity to participate in the culminating national fly-off event held in Northern Virginia on May 14, 2016. The purpose of the TARC program is to inspire and excite students about learning and careers in science, technology, engineering and mathematics. The Challenge is not intended to be easy, but it is well within the capabilities of

students of these ages with a good background in science and math and some craftsmanship skills.

The objective of the Challenge is to design, build, and fly a safe and stable model rocket to an altitude of exactly 850 feet while also achieving a total flight duration of between 44

and 46 seconds and returning a payload of two raw hen's eggs undamaged. The national winner is the team whose flight vehicle with egg payload comes closest (in the sum of two flights) to an exact altitude (850 feet on the first flight and 825 feet on the second flight) and flight duration (the range of 44 to 46 seconds on the first flight and 43-45 seconds on the second flight) specifications in a safe and stable flight, and returns the eggs from both flights undamaged at the National Finals in May, 2016.

The ten top-ranking teams receive scholarship prize money and their schools/sponsoring organizations receive a cash award to further their rocketry programs with a combined award pool of \$100,000. The TARC champion will compete against teams from



the United Kingdom and France at the Farnborough (UK) Air Show in July 2016.

The National Finals also include a variety of other optional contests and events throughout the day. Some of these are serious competitions, but others are just for fun. Among the most popular is the rocket building competition, where teams will be challenged to construct a flyable rocket from a grab bag of parts. These rockets are judged on both craftsmanship and design creativity. Another favorite is the presentation contest, where teams explain their rocket design process to a panel of judges drawn from the aerospace industry. In addition, TARC offers a variety of awards for things like best craftsmanship of a TARC rocket or most innovative approach to mission. On the lighter side, each year we are impressed by the creativity of teams during the best costume contest. We've had everything from Hogwarts robes, to super heroes, to bunny suits.




This Team Handbook provides the Challenge rules plus some guidelines on how to approach the process of rocket design and flight. It also provides additional sources of information on general model rocket design, construction, and flying. It is not a "cookbook"; no design is provided as an example. The challenge and the learning for each team

come from developing and testing your own completely original design.

Teams should begin the Challenge by becoming familiar with the basics of model rocketry. Those who have no experience with how these models are built and flown should start by reading G. Harry Stine's Handbook of Model Rocketry (available from the [National Association of Rocketry's Technical Services](#))


and by purchasing, building, and flying a basic model rocket kit, such as the one offered by [Aerospace Specialty Products](#) for TARC.

If you live near one of the 170 National Association of Rocketry sections (chartered clubs) or the 400 experienced adult members of the National Association of Rocketry who have volunteered to be mentors, you are encouraged to consult with them. The sections are listed at the [NAR web site](#). The [list of mentors](#) is in the Team America section on the NAR web site. These rocketeers can help teach you the basics of how to build and fly a payload-carrying rocket. Typically they can also help you in locating test-

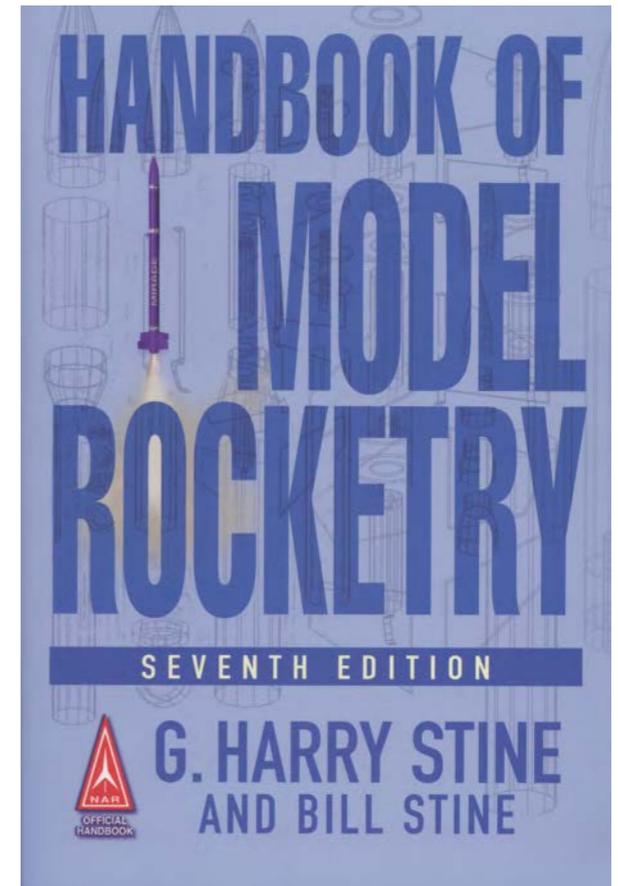

flying launch sites and work with local officials if this is required. Many will allow you to do your practice or qualification flight at one of their already-organized launches (**launch dates and locations** also listed at the NAR web site). **Remember: neither these experts nor any other adult is permitted help you design, build or fly your actual entry.** All of this work must be done by the student members on your team.


If model rocketry interests you and you want to be connected to the rest of the people in the U.S. who are part of the hobby's "expert team," you should join the National Association of Rocketry. You can do this on the NAR website or by filling out the membership application forwarded to each team. Membership brings you insurance coverage, the hobby's best magazine, the bi-monthly Sport Rocketry, and a whole range of other benefits and resources. Good luck! Design carefully, fly safely, and we hope to see you at the national Finals in May 2016.

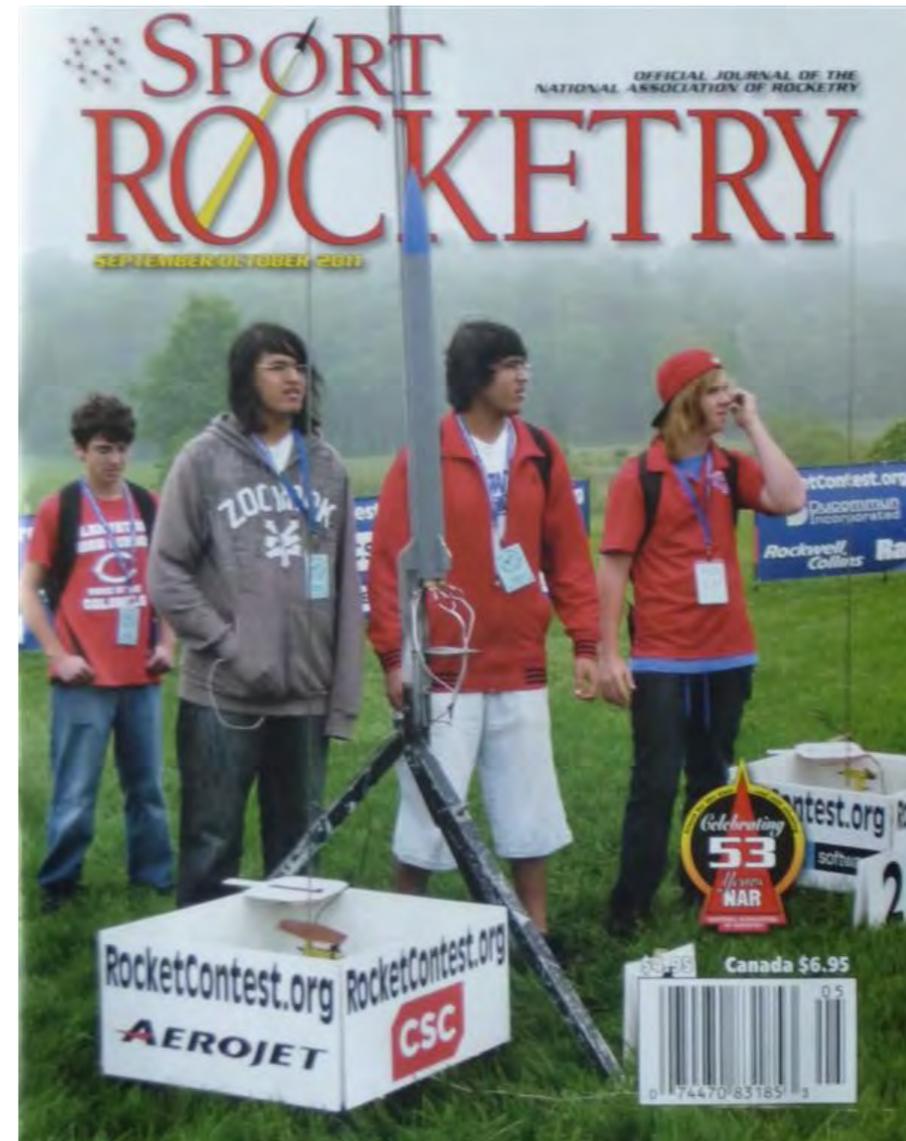

# TARC 2016 Rules

---

At the heart of the Team America Rocketry Challenge is a precisely defined set of rules within which each team must operate. Here are the rules that you and your teammates must follow as you build your aerospace program.

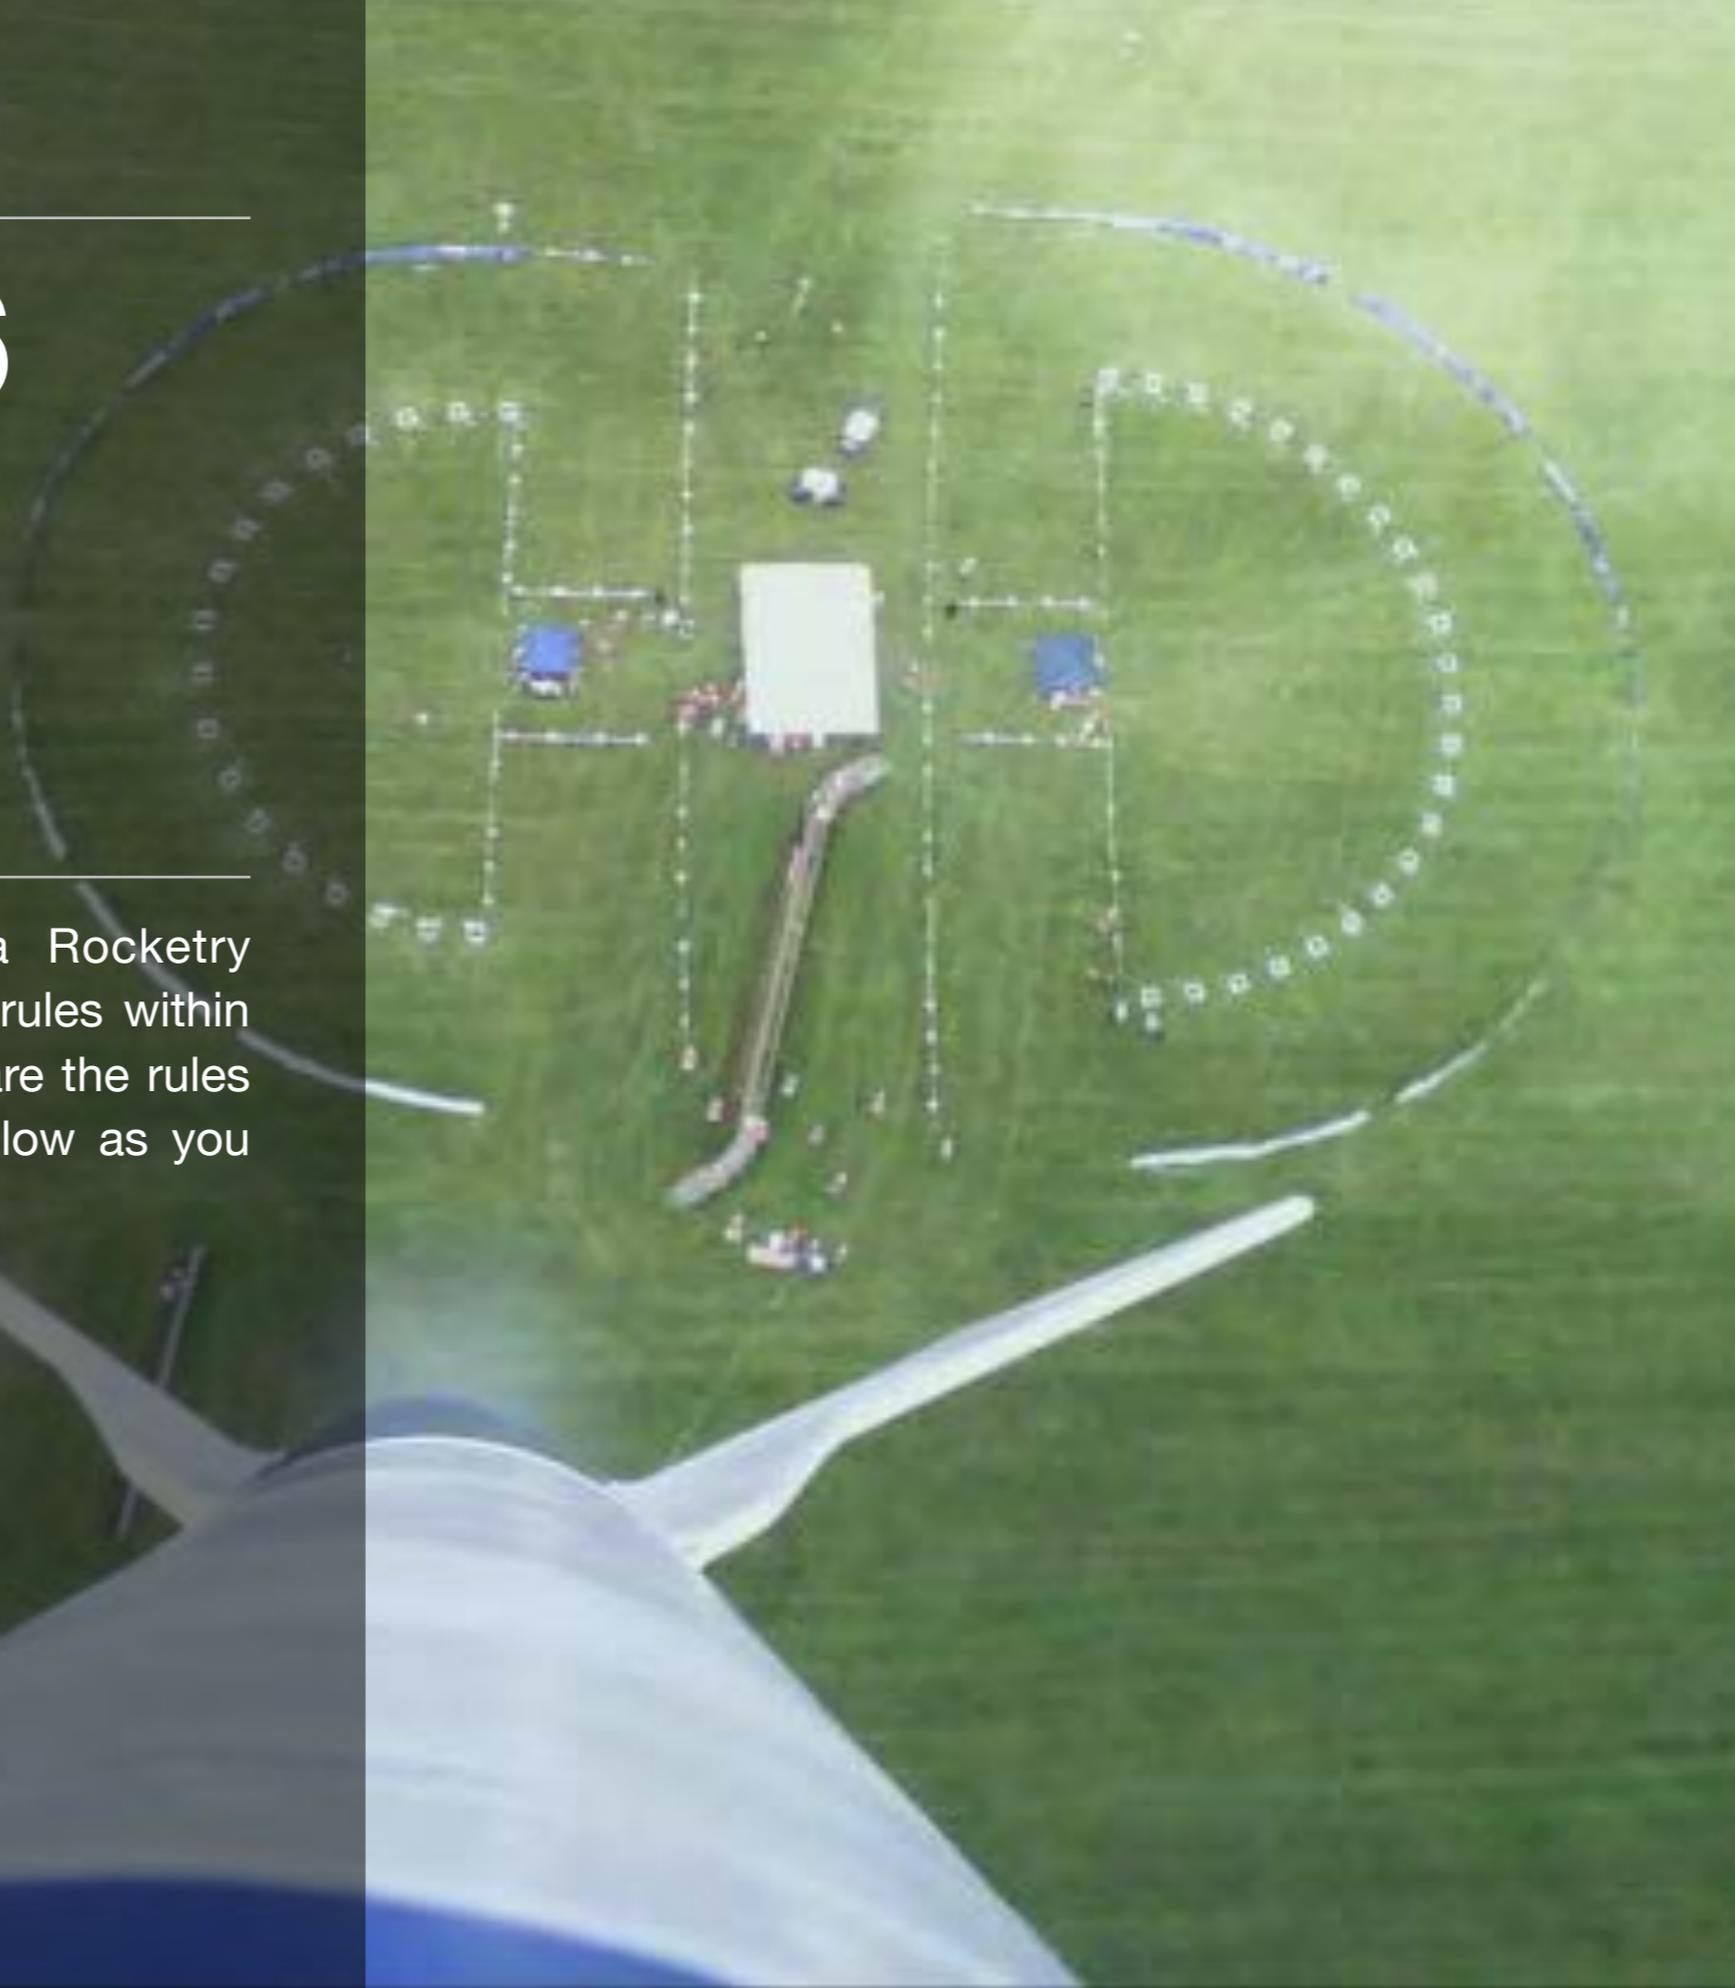

# TARC 2016 Rules

**1. SAFETY:** All rockets must be built and flown in accordance with the Model Rocket Safety Code of the National Association of Rocketry (NAR), any applicable local fire regulations, and Federal Aviation Regulations. Rockets flown at the Finals must have previously flown safely and successfully. Rockets will be inspected before launch and observed during flight by an NAR official, whose judgment on their compliance with the Safety Code and with these rules will be final. Teams are encouraged to consult with designated NAR officials who are running this event well before the fly-off to resolve any questions about design, the Safety Code, or these rules.

**2. TEAMS:** The application for a team must come from a single school or a single U.S. incorporated non-profit youth or educational organization (excluding the National Association of Rocketry, Tripoli Rocketry Association, or any of their local chapters or any

other incorporated rocket organization). There is no limit to the number of teams that may be entered from any single school or organization, but no more than three teams containing students who attend the same school or who are members of the same organization, regardless of whether the teams are sponsored by that school or organization, can be invited to attend the Finals. Team members must be students who are currently enrolled in grades 7 through 12 in a U.S. school or homeschool. Teams may have members from other schools or other organizations and may obtain financing from any source, not limited to their sponsoring organization. Teams must be supervised by an adult approved by the principal of the sponsoring school, or by an officially-appointed adult leader of their sponsoring organization. Minimum team size is three students and maximum is ten students. Each student member must make a significant contribution to the designing, building, and/or launching of the team's entry. No part of any of these activities



for a rocket used in a qualification flight or at the Finals may be done by any adult, by a company (except by the sale of standard off-the-shelf components available to the general public, but not kits or designs for the event), or by any person not a student on that team. No student may be on more than one team. The supervising teacher/adult may supervise more than one team. The Challenge is open to the first 1000 teams that submit a completed application, including payment, postmarked between September 1 and December 4, 2015.

**3. ROCKET REQUIREMENTS:** Rockets must be no less than 650 millimeters (25.6 inches) in length as measured from the lowest to the highest points of their airframe structure in launch configuration, and must not exceed 650 grams gross weight at liftoff (Note: California state law has limitations on model rockets over 500 grams in that state until January 1, 2016). They may not be commercially-made kits designed to carry egg payloads with the only modification being the addition of an altimeter compartment. They must have only one stage. They must be powered only by commercially-made model rocket motors of “F” or lower power class that are listed on the TARC Certified Engine List posted on the TARC website and provided in the TARC Handbook. Any number of motors may be used, but the motors used must not contain a combined total of more than 80 Newton-seconds of total impulse based on the total impulse ratings in the TARC list. Rockets must not contain any pyrotechnic devices except those provided as part of the basic commercially-made

rocket motor used for the flight, and these must be used in the manner prescribed in the instructions for that motor. All parts of the rocket must return to the ground safely as a single connected set, using a recovery device of the team’s choice. The rocket must be allowed to land at the end of flight without human intervention (catching) and will be disqualified if there is such intervention.



**4. PAYLOAD:** Rockets must contain and completely enclose two raw hen's eggs of 55 to 61 grams weight, a diameter of 45 millimeters or less, and a length of 60 millimeters or less; and must return them from the flight without any cracks or other external damage. One of the two eggs must be flown oriented with its long axis perpendicular to the long axis of the rocket’s body, and the other egg must be flown with its long axis parallel

to long axis of the rocket's body. The eggs will be issued to the teams by event officials during the finals, but teams must provide their own eggs for their qualifying flights. The eggs and altimeter must be removed from the rocket at the end of the flight in the presence of a designated NAR official and presented to that official, who will inspect the eggs for damage after their removal and will read the altimeter score. All coatings, padding, or other materials used to protect the eggs must be removed by the team prior to this inspection. Any external damage to either of the eggs noted after their flight and removal from the rocket by the team is disqualifying.

##### **5. DURATION SCORING:**

The duration score for each flight shall be based on total flight duration of the rocket, measured from first motion at liftoff from the launch pad until the moment that the first portion of the connected rocket assembly touches the ground (or a tree) or until the rocket can no longer be seen due to distance or to an obstacle. Times must be measured independently by two people not on the team, one of whom is the official NAR-member adult observer, using separate electronic stopwatches that are accurate



to 0.01 seconds. The official duration will be the average of the two times, rounded to the nearest 0.01 second, with .005 seconds being rounded up to the next highest 0.01 seconds. If one stopwatch malfunctions, the remaining single time will be used. The flight duration goal is a range of 44 to 46 seconds. Flights with duration in the range of 44 to 46 seconds get a

perfect duration score of zero. Duration scores for flights with duration below 44 seconds will be computed by taking the absolute difference between 44 seconds and the measured average flight duration to the nearest 1/100 second and multiplying this by 4. Duration scores for flights with durations above 46 seconds will be computed by taking the absolute difference between 46 seconds and the measured average flight duration to the nearest 1/100

second and multiplying this by 4. These duration scores are always a positive number or zero. For those teams at the Finals that are invited to make a second flight based on their first-flight performance, the target duration for the second flight at that event will be 43 to 45 seconds and scoring for flights with durations above or below this range will be aligned to match the procedures for the 44-46 second range.

**6. ALTITUDE SCORING:** Rockets must contain one and only one electronic altimeter of the specific commercial types approved for use in the Team America event. These types are the Perfectflite APRA, Pnut, or Firefly. The altimeter must be inspected by an NAR official both before and after the flight, and may not be modified in any manner. The altimeter must be confirmed by this official before flight to not have been triggered and to be ready for flight. The peak altitude of the rocket as recorded by this altimeter and sounded or flashed out on its audible or visible light transmission post-flight will be the sole basis for judging the altitude score and this altimeter may be used for no other purpose. The altitude score for every qualification flight and for the first flight at the Finals will be the absolute difference in feet between the 850 feet (259 meters) target altitude and the altimeter-reported actual flight altitude in feet (always a positive number or zero). For those teams at the Finals that are invited to make a second flight based on their first-flight performance, the target altitude for the second flight at that event will be 825 feet (251 meters).

**7. FLIGHTS:** Team members cannot be changed after the first qualification flight, with one exception as noted below for the



Finals. Only team members on record at Aerospace Industries Association (AIA) with valid parent consent forms are eligible to receive prizes. In order to be eligible for the national final fly-off event, a team is required to fly and submit the results from at least two qualifying flights observed in person by an adult (senior)

member of the NAR (unrelated to any team members or to the team's adult supervisor and not a paid employee of their school or member of their youth group) between September 1, 2015 and Monday April 4, 2016. Each team may conduct a maximum of three qualification flights, and will be ranked based on the sum of the best two qualified flights. More than two qualification flights are not required if the team is satisfied with the results of their first two flights. A qualification flight attempt must be declared to the NAR observer before the rocket's motor(s) are ignited. Once an attempt is declared, the results of that flight must be recorded and submitted to the AIA, even if the flight is unsuccessful. A rocket that departs the launch pad under rocket power is

considered to have made a flight, even if all motors do not ignite. If a rocket experiences a rare "catastrophic" malfunction of a rocket motor (as determined by the NAR official observer), a replacement flight may be made, with a replacement vehicle if necessary. Flights which are otherwise fully safe and qualified but

which result in no altimeter reading despite correct usage of the altimeter by the team, or that result in a reading of less than 50 feet despite a nominal flight will be counted as “no flight” and may be reflown without penalty. The results from qualification flight attempts must be faxed or scanned and e-mailed to and received at the offices of the AIA by 11:59 PM Eastern time on Monday, April 4, 2016. Based on these qualification scores 100 teams (with a limit of no more than the best three made up of students from any single school or organization) will be selected



on the basis of lowest combined scores for their best two flights. If a school has more than three teams whose flight score is better than the cutoff score for Finals selection, they may adjust the membership of the three best teams invited to attend the Finals to include students from other teams with scores that met the Finals cutoff, up to a limit of ten students on any single team. Teams will be notified no later than 5 PM on Friday April 8, 2016, and will be invited to participate in the final fly-off to be held on May 14, 2016 (alternate date in case of inclement weather May 15, 2016).

**8. SAFE RECOVERY:** Every portion of the rocket must return to earth connected together, and at a velocity that presents no hazard. Any entry which has any structural part (including but not limited to an expended engine casing) fall to earth separately will be disqualified.

**9. RETURNS:** Return of the rocket with eggs and altimeter is required by the deadline time on that same day that was established at the beginning of the day's flying. If the rocket cannot be returned after an otherwise safe and stable flight because it cannot be located or because it landed in a spot from which recovery would be hazardous (as determined by an NAR official), a replacement vehicle may be substituted for a replacement flight. Once the NAR official has declared that a rocket has landed in a place from which recovery would be hazardous, the results from that rocket's flight may not subsequently be used even if it is recovered.

**10. LAUNCH SYSTEMS:** Teams may use the electrical launch system and the launch pads (with six-foot long, 1-inch rails or 1/4-inch diameter rods) provided by the event officials at the fly-off, or may provide their own system. Systems provided by teams for their own use must be inspected for safety by an NAR official before use, and must provide at least 6 feet of rigid guidance, including use of a rod diameter of at least 1/4 inch, if a rod is used. All launches will be controlled by the event Range Safety Officer and must occur from the ground.

**11. FLIGHT CONTROL:** Rockets may not use an externally-generated signal such as radio or computer control (except GPS navigation satellite signals) for any purpose after liftoff. They may use autonomous onboard control systems to control any aspect of flight as long as these do not involve the use of pyrotechnic charges.


**12. PLACES:** Places in the final fly-off of the competition will be determined on the basis of the sum of the altitude and duration scores. At the fly-offs, at least 24 teams will be invited to make a second flight based on the results of their first flights. In these second flights, rockets which have issues which would otherwise rate a replacement flight under TARC rules #7 or #9 will not receive a replacement flight. Prizes awarded to the top places will be awarded only to those teams that make a second flight. The top final places will be ranked on the basis of the scores from the two qualified flights made at the fly-offs.

Remaining places will be awarded based on the scores from the first flight. Ties will result in pooling and even splitting of the prizes for the affected place(s) -- for example, a two-way tie for 4th place would result in a merger and even division of the prizes for 4th and 5th places. If there is a tie for one of the top three places, the teams involved in the tie will be required to make a third flight to determine final places. Aerospace Industries Association reserves the right to make all last and final contest determinations.



# Key Points

A rocket isn't the only thing you'll be building, as you'll also be developing a testing schedule, dividing responsibilities among team members, and raising money for testing and travel. These ten simple tips will help make sure your TARC program stays on course.

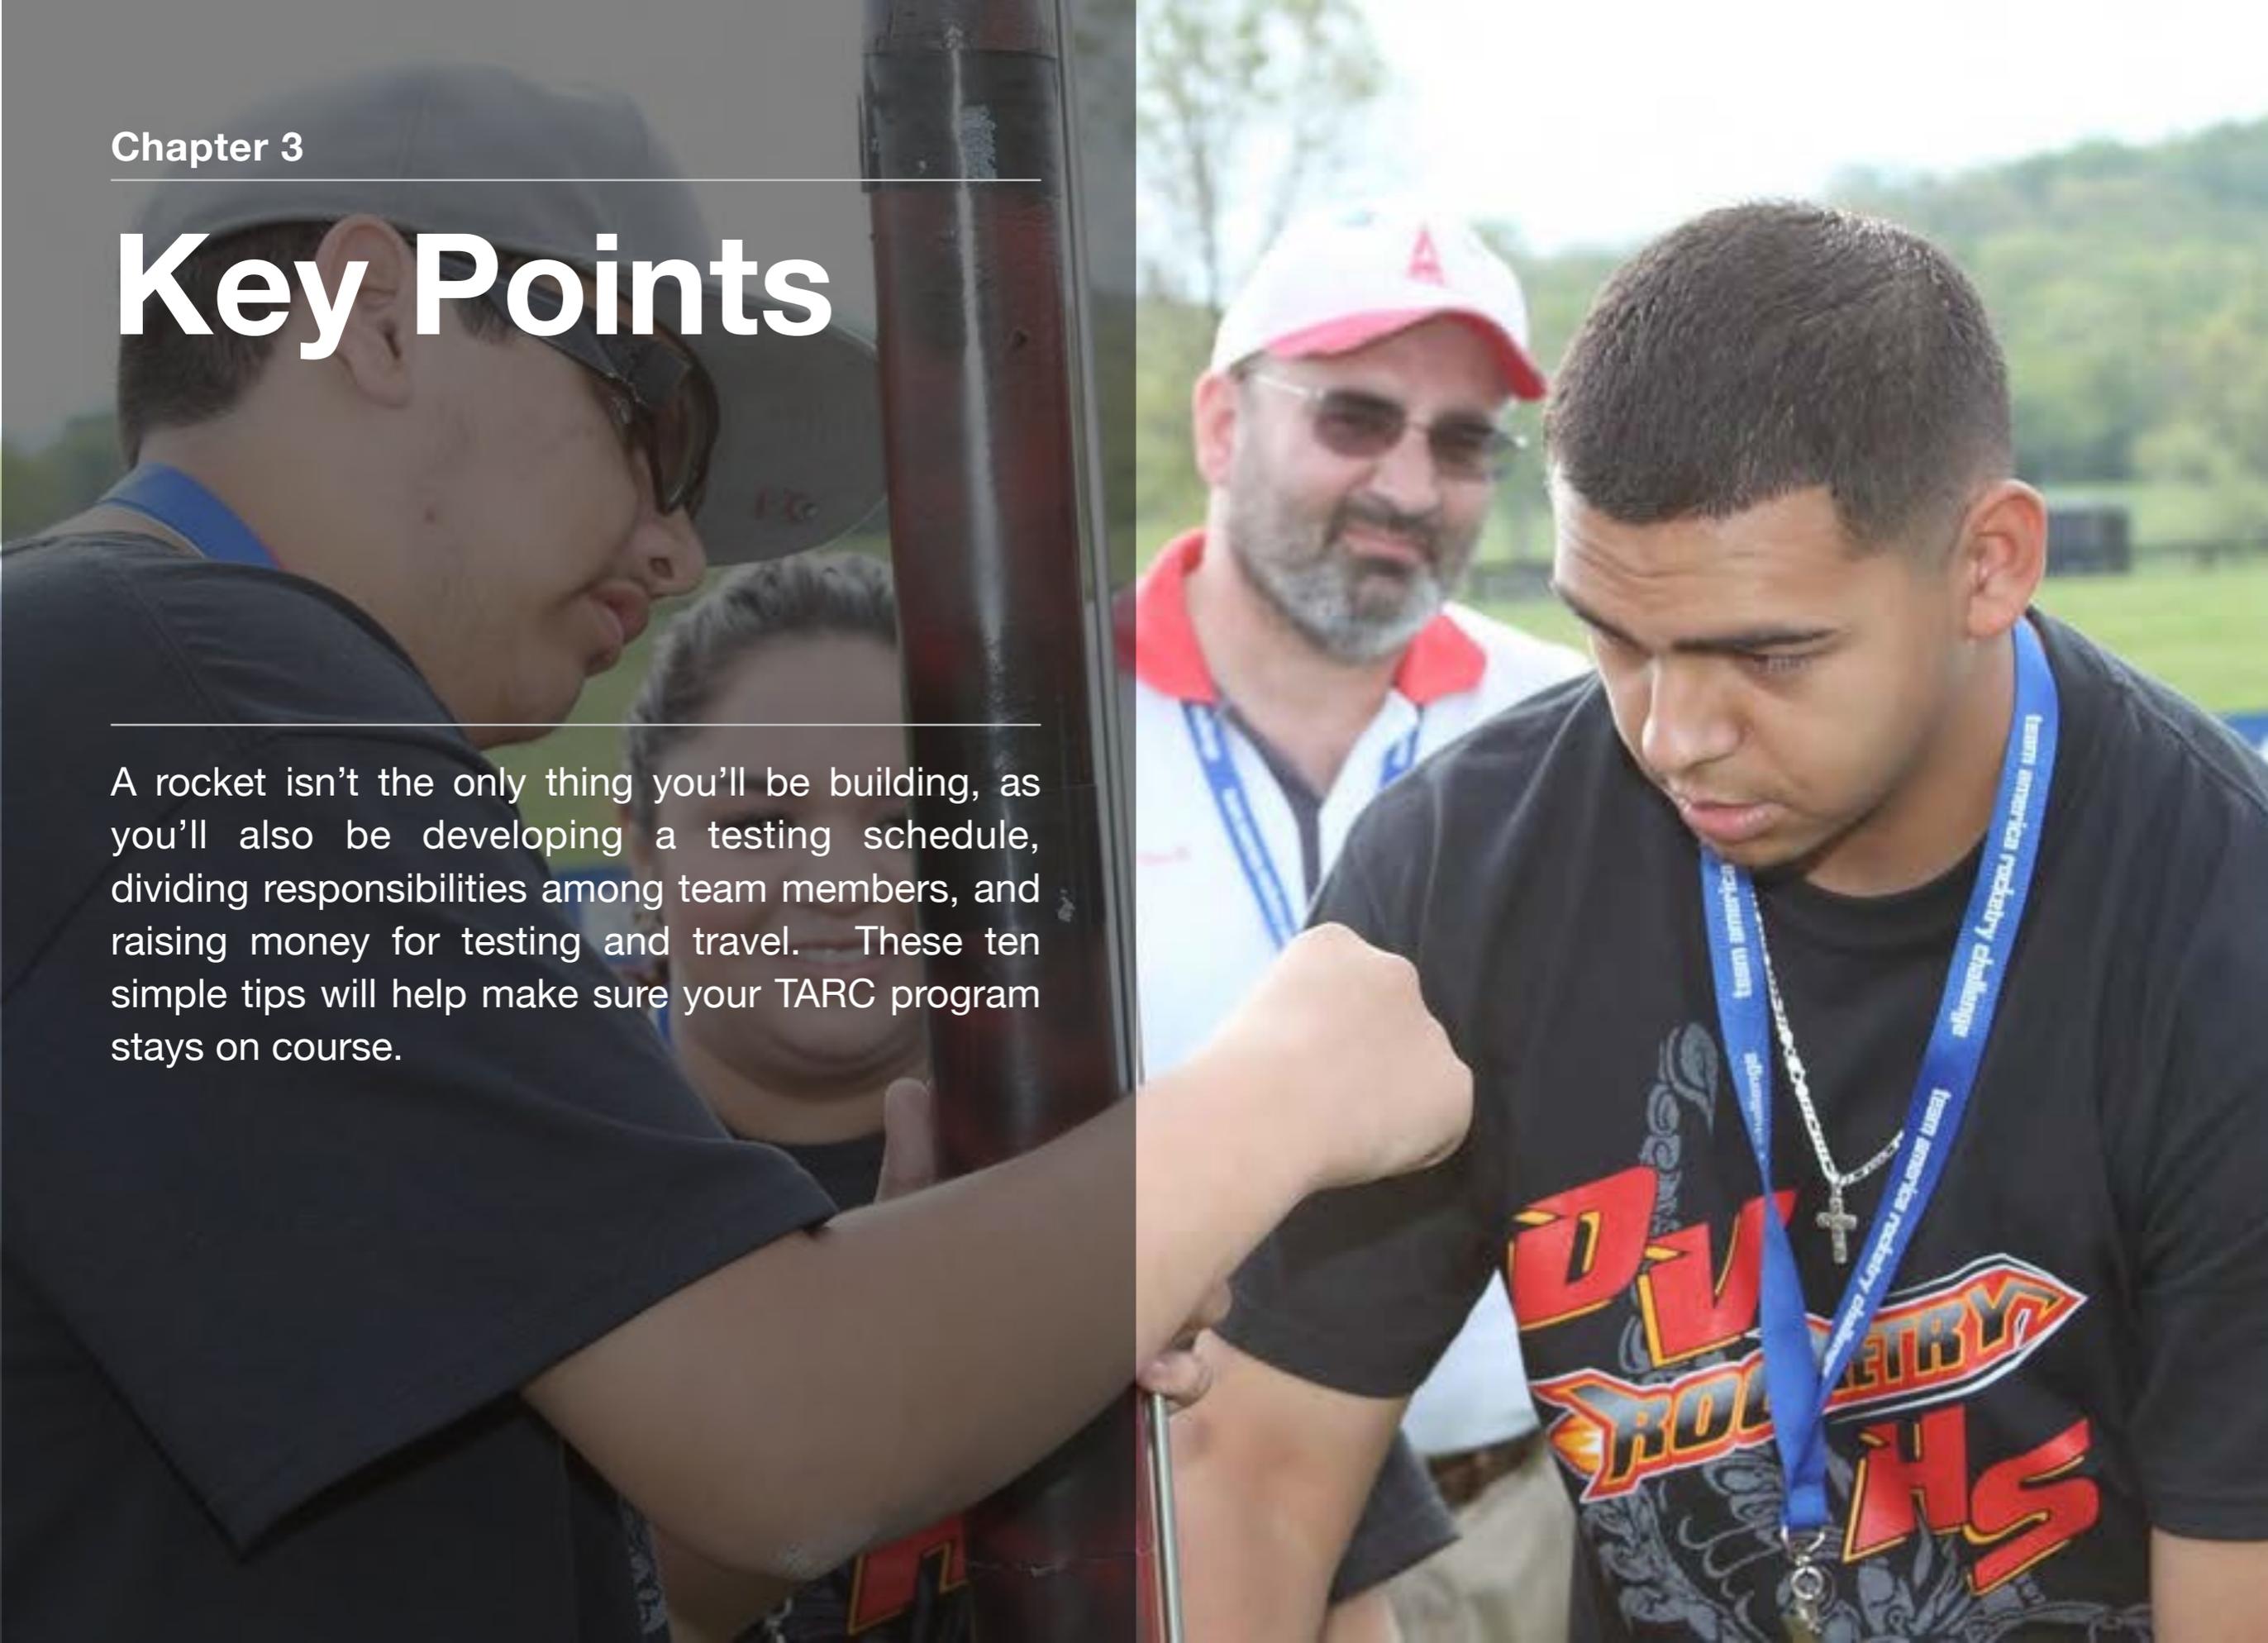

# Key Points



After you read and understand the rules ([Chapter 2](#) in this Handbook), here are the ten key points about how to succeed in TARC 2016:

1. Do not make your TARC rocket the first rocket you build and fly; if you have never done model rocketry before, build and fly a simple rocket first.

2. Reach out to a NAR TARC mentor early for advice on how to build a rocket, where to get your rocketry supplies, and where to fly.

3. Develop a budget and a division of labor and schedule for your team's efforts, and raise the money needed to buy the parts and rocket motors it will take to be successful; plan on at least 10 practice flights. A typical budget is between \$500 and \$1000, including entry fee and one altimeter, plus the parts for two rockets and the rocket motors for

ten flights, but not launch equipment or travel to the Finals. See [Appendix 7](#) for tips on fund raising.

4. Get your initial design done before Christmas; use one of the computer programs to see if it will be stable in flight, and how high it is likely to go with which rocket motor, before you build it.



5. Do your first flight test by sometime in January, so that in case you have to do a major change in your design or your rocket crashes you have time to recover before the qualification flight deadline of April 4, 2016; and so that you have time to do lots of flight tests before this deadline.

6. Do lots of flight tests of your design and take data on each test (rocket weight, motor type, altitude and duration; wind and temperature conditions; launch angle) so that you can make the right adjustments to exactly hit the target flight performance.

7. Figure out who your official NAR flight observer will be for your qualification flights, and make sure that you know when they are available. Keep in mind that they are volunteers and may not be able to drop everything else they are doing on short notice to support you.

8. Remember that up to three qualification flights are permitted, and the two best scores count for computing the score for determining Finals eligibility.

9. Complete your qualification flights and submit the scores by the deadline of April 4; do not wait until the last weekend to fly and just hope that the weather will be perfect and an NAR observer will be available!

10. If you have a very good combined two-flight score from your qualification flights, develop your plan for how you will fund your travel to the TARC Finals, in case you are one of the 100 top teams that are announced on April 8, 2016.



## Chapter 4

---

# Rocket Design

Great results always start with a great plan. By focusing your early efforts on planning, design, and simulation, your team will arrive at a workable design more quickly and with less expense.



# Rocket Design

**How do you approach the process of designing a flight vehicle?** Engineers start with what is a fixed, given quantity -- such as the size and shape of the egg payload and its cushioning and the altimeter -- and with what the mission performance requirements are. In this case the requirement is to go to 850 feet and stay up for 44-46 seconds, and then make a safe return to earth at the end. No matter what your design, it must incorporate this payload and achieve the performance requirement.

The Challenge is finding the exact combination of airframe design, rocket engines, and duration-control technique with a parachute that will achieve exactly 850 feet and 44-46 seconds. Doing this will require either lots of trial-and-error (not recommended), or smart use of a rocket-design and flight-simulation computer program to get the design "roughly right" first. Modern aerospace engineers do lots

of "flight tests" on a computer before they start building and flying hardware--it's quicker and cheaper!

What, then, are the variables in yours aerospace system's design? Well, the size and shape of the rocket certainly has a

wide range of possibilities, subject to the overall limitations that the rocket must be safe and stable, must be at least 650 millimeters in overall length, must not exceed 650 grams (23 ounces) in weight, and must have a body diameter sufficient to accommodate an egg that could be as long as 60 millimeters that is oriented sideways (plus a second egg oriented lengthways). And the selection of the vehicle's rocket motors is another major variable. Since any certified

commercially made model rocket motor or combination of motors with an aggregate total of 80 Newton-seconds or less of total impulse may be used, you must pick which ones you plan



to use from the "Team America Approved Motor List" posted (and updated) at the National Association of Rocketry [website](#) at and in [Appendix 3](#) of this Handbook. Because of the size of the payload (a large hen's egg must weigh between 55 to 61 grams and the TARC 2016 rules require the rocket to have a body tube diameter that can accommodate an egg lengthways of up to 60 millimeters) and the minimum length requirement of 650 millimeters, rockets entered in this Challenge will be fairly large. The minimum liftoff weight is probably about 10 ounces and the rocket will probably need at least a low-range F motor to achieve the altitude goal.



There are other design variables to be considered including:

- how to predict or control flight duration in various weather conditions
- how to cushion and protect the fragile eggs
- what kind of electrical launching device to use.

What all of this means is that, like all engineers, you must engage in an iterative design process. You start with a very rough design, evaluate its performance against the requirements, and change the design progressively until your analysis shows that you have a design that is likely to meet them. Then you build, test, evaluate the success or failure of the test, and adjust the design as required until your analysis and tests show that the performance requirement is approximately met. Initial tests are best done as virtual flights on a computer, with the time-consuming construction and relatively expensive flight testing of an actual rocket saved for the second step.

Remember that this event is also about teamwork; engineers design in teams because complex projects that are due in short periods of time demand some kind of division of labor. There are many ways to divide the labor -- perhaps one person could become expert in computer flight-simulation programs, another in the craftsmanship techniques of model rocket building, a third in launch system design, and a fourth in charge of fundraising. All the members need to meet and communicate regularly, because

what each one does affects how all the others approach their part of the job. You will need to elect or appoint a Program Manager/ Team Captain to make sure everything fits together at the end so that your complex system will work in flight test. ***And you need to start early!***

Here is a path that you may wish to follow to take you through the design process, along with some additional explanation of the design implications of rocketry terminology used in the [event rules](#) and in the [NAR Safety Code](#).

### **1. Accommodate the payload.**

Determine what size compartment is required to contain the altimeter and (separately) two Grade A large eggs oriented at 90 degrees from each other and to cushion the eggs against the shocks of rocket launch, recovery system deployment in flight, and impact with the ground at the end of flight.

*Hint: Make sure you cushion the eggs from impact with the walls of the payload compartment or metal hardware including the altimeter in every direction including the sides when the rocket's recovery device snaps open, and that you put a solid disc in addition to padding between the two eggs so they do not contact each other in flight.*



**2. Accommodate the instrumentation.** One of the electronic altimeters specified for the event must be used in your rocket, and will be the sole basis for measuring the rocket's achieved maximum altitude. You may install other additional altimeter-based systems if you wish, to control duration or other features, but only the official altimeter types can be used for the official record of achieved altitude. It is very important that the compartment in which the altimeter is placed be properly positioned on the rocket and vented with holes as described in [Appendix 5](#), so that the air pressure inside it is always at equilibrium with the outside air pressure. The instrument measures altitude on the basis of the air pressure changes it senses during flight.

*Hint: Place the altimeter in a compartment that is totally sealed on the bottom against intrusion by high-pressure gases from the rocket motor's ejection charge. These gases will make the altitude reading inaccurate.*

*Hint: Secure the altimeter in place mechanically in its compartment, don't let it "rattle" around or rely on foam padding to hold it in place (such padding might interfere with proper pressure equalization of the compartment). But make it easy to remove, because you will have to remove the altimeter both before and after flight for inspection by event officials. Secure the battery in place (on the APRA model) and secure the shorting plug that powers up the altimeter so that neither can shake loose in flight.*

**3. Decide on a recovery system design approach.** No specific type or size of recovery system is required under this year's rules; you have the flexibility to use one or more parachutes, or any other safe form of recovery. All parts of the rocket that go up have to come down as one connected group, though, no parts such as payload capsules or motors may separate and recover independently. If you plan to use a parachute then read the Appendix 4 information on parachute recovery systems. Determine how to trade off among parachute-design features (canopy diameter and shape, number and length of shroud lines, size of center spill hole, etc.) in order to achieve the specified duration of 44 to 46 seconds.

**4. Learn to use a rocket-design computer program.** There are three good rocket-design programs currently available: the commercial RockSim and SpaceCAD programs and the "freeware" Open Rocket program. Such a program is the best way to work through the remaining steps of flight vehicle design on a basis other than trial-and-error. There is no single correct design for this Challenge; there are many different combinations of motor types, rocket length and diameter, rocket weight, and recovery system configuration that could lead to a flight altitude of 850 feet and flight duration of 44-46 seconds. A computer program will let you work through the rough possibilities fairly quickly and discard approaches that simply will not work or designs that are not aerodynamically stable. No simulation, however, is exactly accurate. Its estimate of the aerodynamic



drag forces on your rocket may be off due to your construction techniques and it may therefore overestimate how high your real rocket will go; the rocket motors you use may perform slightly differently from the notional data for them in the program due to normal manufacturing variations, etc. That's why you still need to (and are required to) test-fly at the end of the design process.

**5. Simplicity.** The more complex you make your rocket design, the more things it has that can go wrong and the more it will cost both to develop and test. In the real world of engineering, low cost, rapid delivery, and high reliability are what the customer wants. In this Challenge, since your eligibility for the top ten

prizes is based on the results of your flight attempts at the Finals, whatever you fly has to work perfectly the first time. Add complexity (such as clustered rocket motors) only where you need to in order to meet performance requirements. It may turn out that you need to use something complex, but don't assume so from the start.

**6. Basic design safety.** First and foremost, your rocket must be "stable." Read the Handbook of Model Rocketry chapter on stability if you do not know what this means, and use a computer program to calculate stability if in doubt. Because your rocket will be nose-heavy as a result of the eggs and altimeter and its overall length (minimum of 650 millimeters), you should not need extremely large fins -- be conservative and design for a stability margin of at least two "calibers" (Center of Gravity ahead of Center of Pressure by at least two body tube diameters) with the eggs and with loaded rocket motors. Second, make sure that the motor(s) you pick provide enough thrust to give your size/weight rocket a speed of 40 ft/sec or so by the time it reaches the end of its launcher, so that it does not "stagger" slowly into the air and tip over and fly

non-vertically if there is any wind. Generally, you need a motor or combination of motors whose combined average thrust is at least five times the rocket liftoff weight. As a rule of thumb, make sure that the model's motors' combined average thrust (in units of Newtons, which is how these are marked on the engine casing) is at least 1.5 times the rocket's liftoff weight in units of ounces.



Finally, plan on using a launch rod of at least 6 feet in length and 1/4 inch in diameter or (better yet) a rail for flying these heavy rockets -- they will need the length to achieve safe speed and the rigidity to avoid "rod whip" when the heavy rocket is at the end of the launch rod on its way up. Both 1/4 rods and 1-inch rails will be available for your use at the Finals.

Electronic recovery system deployment systems, if you choose to use them, must be SAFE. If they are designed to sense acceleration or deceleration of the rocket as the basis for starting an ejection sequence, then there is a great risk that they can trigger on the ground or in your hands if you drop or jog the rocket while carrying it. Such systems must have a power switch,

plug, or other electrical disconnect mechanism that permits you to maintain them in a completely "safe" configuration until placed on the launching pad, and will not be allowed to fly if they do not. These systems may not use pyrotechnic charges of any type (no Pyrodex or black powder) to trigger deployment, but may use standard igniters to burn through or deploy something.

**7. Commercial vs Custom Parts.** The flight vehicle must be made by the student team members. You may use commercially-available "off the shelf" component parts (body tubes, nose cones, egg capsules, parachutes, etc.) and may adapt some kinds of rocket kits for the event, or you can scratch-build components if you prefer. If a company should release a kit or design specifically for the TARC event you would not be allowed to use such a kit or design. Having a custom flight vehicle part fabricated by a composite or plastics company or custom wood machining company (even if it is to your design) does not constitute sale of a "standard off the-shelf product" and is not allowed. Using a 3-dimensional printer to make parts is OK as long as the team does all the programming and runs the printer. Having a mandrel fabricated to your specifications that is used to wrap fiberglass on to make your rocket body would be OK. In this case, the company is making a tool; you are making the part that flies



## Chapter 5

# Rocket Construction

Once you and your teammates have agreed on a design for your rocket you'll need to turn that vision into reality. Like every step of your TARC journey, planning is the key.



# Rocket Construction

**Designing a rocket on a computer is important, but in the end you have to actually build it and fly it.** There are four key resources available to you for learning the craftsmanship techniques for building a model rocket for TARC. Review the online material and read the applicable chapters of the book before you start trying to put together your rocket. Then build and fly a simple rocket kit (such as the TARC practice kit from Aerospace Specialty Products) before you build your TARC entry.

1. Seven web pages of [basic tutorial material](#) on how to build a model rocket on the NAR website.
2. Free online how-to resources from Apogee Components (a TARC partner vendor) on [building model rockets](#).
3. A 45-minute instructional video for rocketeers of all ages on all the steps and techniques involved in building and flying a basic model rocket. This instructional video has been divided into six short segments of 4 to 9 minutes duration and posted online by the Aerospace Industries Association on their YouTube site. The six segments are:

- Part 1: [How Model Rockets Work](#)

- Part 2: [Components of a Rocket](#)
- Part 3: [Construction](#)
- Part 4: [Finishing the Rocket's Fins](#)
- Part 5: [Assembling the Rocket](#)
- Part 6: [Painting the Completed Rocket](#)

4. The NAR's official handbook, the Handbook of Model Rocketry by G. Harry and Bill Stine, which TARC teams can purchase at a discount price of \$20 from [NARTS](#).

There are many aspects to constructing a rocket, and this section will not review everything that these resources tell you. Below are some common mistakes we have observed in the last thirteen years.

1. Don't over-spend on parts. The basic components of a rocket, such as paper body tubes, balsa fins, and balsa or plastic nose cones are not going to cost you a lot if you design your rocket to use the inexpensive parts that are available from the four "official" component vendors for TARC: Aerospace Specialty

Products, Balsa Machining Service, Heavenly Hobbies, or Estes. See their addresses in the "Resources" chapter of this Handbook. Get advice from an experienced NAR mentor concerning where to get parts and what kinds to get, to avoid overspending on materials that are overpriced or will not be needed.

2. Use the right materials in the right places. Body tubes and launch lugs should be commercially-made, smooth, and strong. Don't try using gift-wrap rolls or other "economy" parts for the main structural member of your rocket, or soda straws for launch lugs. Use balsa wood (or aircraft plywood or basswood) from a hobby store for your fins, probably at least 1/8 inch thickness (for balsa), and make sure that the wood grain lines start on the fin-body glue joint and go outward from it. Put at least a 30-inch long piece of 1/4 inch wide sewing elastic in your recovery system as a "shock cord" between the egg section and the main body of the rocket, to absorb the opening shock of the recovery system.

3. Use the right glues. Body parts should be held together with yellow carpenter's wood glue or epoxy, not white glue or hot-melt glue. You can use cyanoacrylate "super" glues for repairs, but do not use them for structural construction. You can reinforce fin-body joints with a "fillet" of hobby epoxy, or glue the fins into slots cut into the body tube if you're worried about fins breaking off.



# Rocket Flying

Before you qualify for a spot at the TARC Finals, you'll need to learn the basic skills required to be a "rocket scientist." Here are the essentials needed to get you and your teammates out to the launch pad quickly and safely.



# Rocket Flying

**Once your flight vehicle (rocket) is designed and built, it's time for flight test.** This section provides some suggestions for organizing and conducting these tests, and for preparing for your flight at the TARC Finals. First and foremost, of course, is safety: read and follow the NAR Model Rocket Safety Code located in [Appendix 2](#).

**1. Launching system.** Consider the launching system to be an integral part of the flight vehicle system design, not an afterthought. Of course, the system has to be electrical and incorporate the standoff distance, safety interlock switch, and other requirements of the Safety Code, and it must be on the ground (no balloons!). But it also has to be able to provide the right amount of electrical current and voltage to fire your rocket motor(s) igniter(s), and it must provide rigid guidance to the rocket until it has accelerated to a speed where its fins can properly stabilize it (generally about 40 ft/sec). At the fly-off, an

electrical launch system will be provided that can fire a single igniter of any type with 12VDC and 18 amps of current through one set of clips, and the launching devices provided will be 6-foot-long, 1/4-inch diameter launch rods or 1-inch rails (your

choice). If your design requires something different (such as a tower-type launcher or cluster-motor "clip whip"), you must bring your own equipment and power source. In any case, you will need to have (or borrow) a system for pre-fly-off test-flying. You may want to have one team member assigned the job of designing and building the launcher, particularly if you do not use a commercially-made

"off the shelf" system.

**2. Federal Aviation Administration (FAA).** Model rockets that weigh 3.3 pounds (1500 grams) or less and have less than 4.4





ounces (125 grams) of propellant are exempt from flight regulation by the FAA; it does not take FAA notification or clearance to fly them anywhere in the U.S. This is explicitly stated in [Federal Aviation Regulations \(FAR\) Chapter 101.1](#). Of course, you must follow the NAR Safety Code and not fly when aircraft are nearby or might be endangered or alarmed by your flight!

**3. Launch Site.** The [launch site](#) for the Challenge Finals is about 1500 feet by 2500 feet of treeless closely-mowed grassland. If the winds on the date of the Finals are fairly light, recovery will be easy; in windy conditions (above 15 miles per hour), rockets that achieve a 46-second duration could drift out of the field.

The site you use for pre-Finals flight testing may or may not be large, but note the minimum site dimensions in the NAR Model Rocket Safety Code, which depend on the size of the motor(s) in your rocket. The first and most important thing you must have at a launch site is permission from the owner! If your school or organization has a suitable site and supports this event, your problem is easily solved. Otherwise, you must work with local park authorities, private landowners, etc. for permission to use a suitable site. There are generally two concerns expressed by landowners concerning rocket flying:

- "*It's dangerous*". Not true - the NAR handout at [Appendix 10](#) summarizes why this is so, and should be used (along with the NAR Safety Code at [Appendix 2](#)) to persuade site owners of this. The accident rate for model rocket flying is nearly zero with exactly zero fatalities caused by the rockets, and it is hundreds of times safer than any of the organized athletic events that use similar open fields!

- "*I'm afraid of the liability (lawsuit) consequences if anything happens*". If you are a member of the NAR, or if you are a member of a TARC team flying at a launch organized and run by an NAR "section" (club) you have personal coverage of up to \$5 million against the consequences of an accident that occurs while you are flying, as long as you are following the NAR Safety Code. See [Appendix 8](#) for more information on this insurance coverage. If your organization, school, school district, or other landowner of

your rocket launch site requires liability insurance, your team can obtain "site owner insurance" coverage for this potential liability by having your supervising teacher/adult and at least three student members of the team members join the NAR and then having the supervising teacher/adult order "site owner insurance" from NAR Headquarters. See the [NAR website](#) for more information. This insurance is not available to provide personal coverage for school officials or organization officials, only for the legal owner of launch sites. This additional coverage costs \$15 per site insured and requires filling out either an online form or a mail-in form, both available at the [Team America section of the NAR website](#).

**4. Launch Safety.** Your rocket and your launch system (if any) will be inspected for flight safety by an event official before they may be used in the Finals. Any discrepancies noted there must be corrected before flight is allowed. ***AT THE FINALS, YOUR ROCKET MUST HAVE PREVIOUSLY BEEN SUCCESSFULLY TEST-FLOWN.*** You must also be prepared to show and explain any complex rocket features affecting flight such as electronic timer systems, etc. The pre-flight safety check will also look for the following types of things:

- Do the motors (or motor) have sufficient thrust (average thrust to liftoff weight ratio 5 or greater) to give the rocket a safe liftoff velocity from its launcher?

- Is the rocket stable (CG at least one caliber ahead of CP) with motor(s) and egg installed?
- Are the motor(s) used listed on the [TARC Approved Engine List](#), and are they clearly not modified in any manner by the user?
- Are the fins and launch lugs or rail buttons attached securely and straight?
- Is the recovery system (shock cords and anchors, parachute material, etc.) sturdy enough to withstand the shock of opening with that rocket?
- Does the design prevent any expended motor casings or other massive objects from being separated in flight?
- Does the launch system (if the team provides its own) comply with Safety Code requirements for interlocks and standoff distance; can it deliver enough current to ignite multiple motors at once (if cluster ignition is planned); and does the launcher have sufficient length (6 feet is minimum) and stiffness (if a launch rod is used, it must be 1/4-inch) to guide the rocket securely until it reaches safe speed?

***Important!*** It is against the law to travel by airliner with rocket motors in your luggage. We will have a motor vendor ([Hangar11 Hobbies](#)) available on site at the finals for teams who fly in, and will provide information on how to advance-order Finals motors from the vendor for onsite delivery.

# Qualifying and Practice Flights

What do soccer, algebra, violin, and rocketry have in common? If you want to be good at any of these endeavors you'll need to invest in some solid, dedicated practice.



# Qualifying and Practice Flights

**Practice-fly early and often!** Only by test-flying can you master the skills of recovery system deployment, egg cushioning, and overall flight reliability and repeatability needed for success.

Each team that enters this competition must conduct two NAR-observed "qualification" flights, fill out the attached score form for each one, and return it to AIA. The preferred method for submission of successful qualification flights is via the TARC portal at [rocketcontest.org](http://rocketcontest.org). Submitting through the portal will give you instant notification that your score was received. You may also fax the form to 703-358-1133 or email it to [miles.lifson@aia-aerospace.org](mailto:miles.lifson@aia-aerospace.org) no later than midnight EST Monday, April 4, 2016. NAR observers who observe a qualification flight attempt that is not successful (i.e. crash or broken egg) are asked to fax or e-mail the form on that flight directly to the AIA. Plan ahead for weather (rain or wind that "scrubs" a launch day, problems with the rocket's flight, etc.) and

do not wait until the last minute to try and fly this flight. Teams must provide their own eggs and timing stopwatches for all qualifying and practice flights; pre-measured eggs and timers with watches will be provided by the NAR at the fly-offs.



Selection of the top 100 teams will be made on the basis of the lowest (best) 100 scores reported on the qualification flight forms. Score for any single flight is the total difference (in seconds and hundredths) by which the average timer-measured flight duration was outside the target range of 44.00 to 46.00 seconds (always a positive number) multiplied by FOUR; plus the total difference (in feet) between the altimeter-reported altitude and 850 feet (always a positive number). The final score for determining Finals eligibility is the sum of

the two best (of up to three permitted) scores submitted by a team. Note that cracking of either egg carried by the rocket is disqualifying.

The top 100 qualifying teams (but with a limit of no more than three from any single school or other sponsoring organization), based on their reported scores, will be invited to attend the competitive "fly-off" event that will be held on May 14, 2016 (alternate fly-off date will be May 15, 2016, in case of bad weather) at the Great Meadow Outdoor Center, The Plains, Virginia. All teams who submit a qualification flight form will be notified of their status by April 8, 2016 by a representative of the AIA, and the list of those accepted will be posted at [www.rocketcontest.org](http://www.rocketcontest.org). Notification will be sent to you using the email addresses provided during the registration process.

An official qualifying flight must be declared before the motors are ignited and must be observed by a Senior (adult) member of the National Association of Rocketry, who must be impartial, i.e. not related to any member of the team, and not a paid employee of the school or member of the non-profit organization sponsoring the team. This NAR observer is one of your two required flight timers. In addition, a second impartial person not on the team (who does not have to be a member of the NAR, or an adult) must be the second flight timer. There are three ways to obtain an NAR observer, if you do not already know of a qualified local NAR Senior member who is ready to do this for you:

1. Attend an organized launch run by an NAR section, and fly your rocket at that launch. You can also use these launches as a place to practice-fly before you do your official qualification flight.



These launches are listed in the "Launch Windows" [calendar](#) on the NAR web site. Always call a launch's point of contact before attending to confirm the time and place of the launch.

2. Contact the nearest section or chartered club of the NAR to see if they have launches not listed on the web site. Check the NAR site for a list of these sections and contact information.
3. Contact someone on the list of volunteer mentors posted on the NAR web site. Many mentors live in places remote from an NAR section.

Obtaining an observer and providing stopwatches is the responsibility of each team. PLAN AHEAD, to find an observer for your qualification flight(s). DO NOT WAIT until late March to try to


find someone on a day's notice to observe your flight, and do not expect them to drive a long distance to do so. Upon request, we will send you a roster of every senior NAR member in your state to help you find a nearby qualification observer. Contact us at [rocketcontest@aia-aerospace.org](mailto:rocketcontest@aia-aerospace.org) if you need this assistance. Not every NAR member is aware of the Team America Rocketry Challenge program, so you may have to explain it a bit first when you call one who is not already signed up as a mentor!

If there is no NAR member available within reasonable distance (and this will be true in a number of areas of the US), it is OK to have an impartial adult, i.e. someone who is not related to any member of the team and not a paid employee of the team's sponsoring school or the team's sponsoring non-profit organization, become a NAR member in order to be an observer. NAR membership can be ordered online and is effective the day it is ordered. Observers who joined too recently to yet have a membership card and number may record their membership number as "PENDING" on the qualification flight form, and we will check with NAR Headquarters to get the membership number. Experienced rocketeers are certainly preferred to do the observer duties because they can usually understand the rules better and offer advice and tips at the same time -- but experience is not absolutely required. We do not pre-approve observers, but we will check the form they sign to verify that the observer who signs is a current NAR senior (adult) member.



*President Barack Obama greets TARC Team members Gwynelle Condino, Ana Karen Nieto and Janet Nieto from Presidio (TX) High School.*

# Guidelines for Official NAR Observers

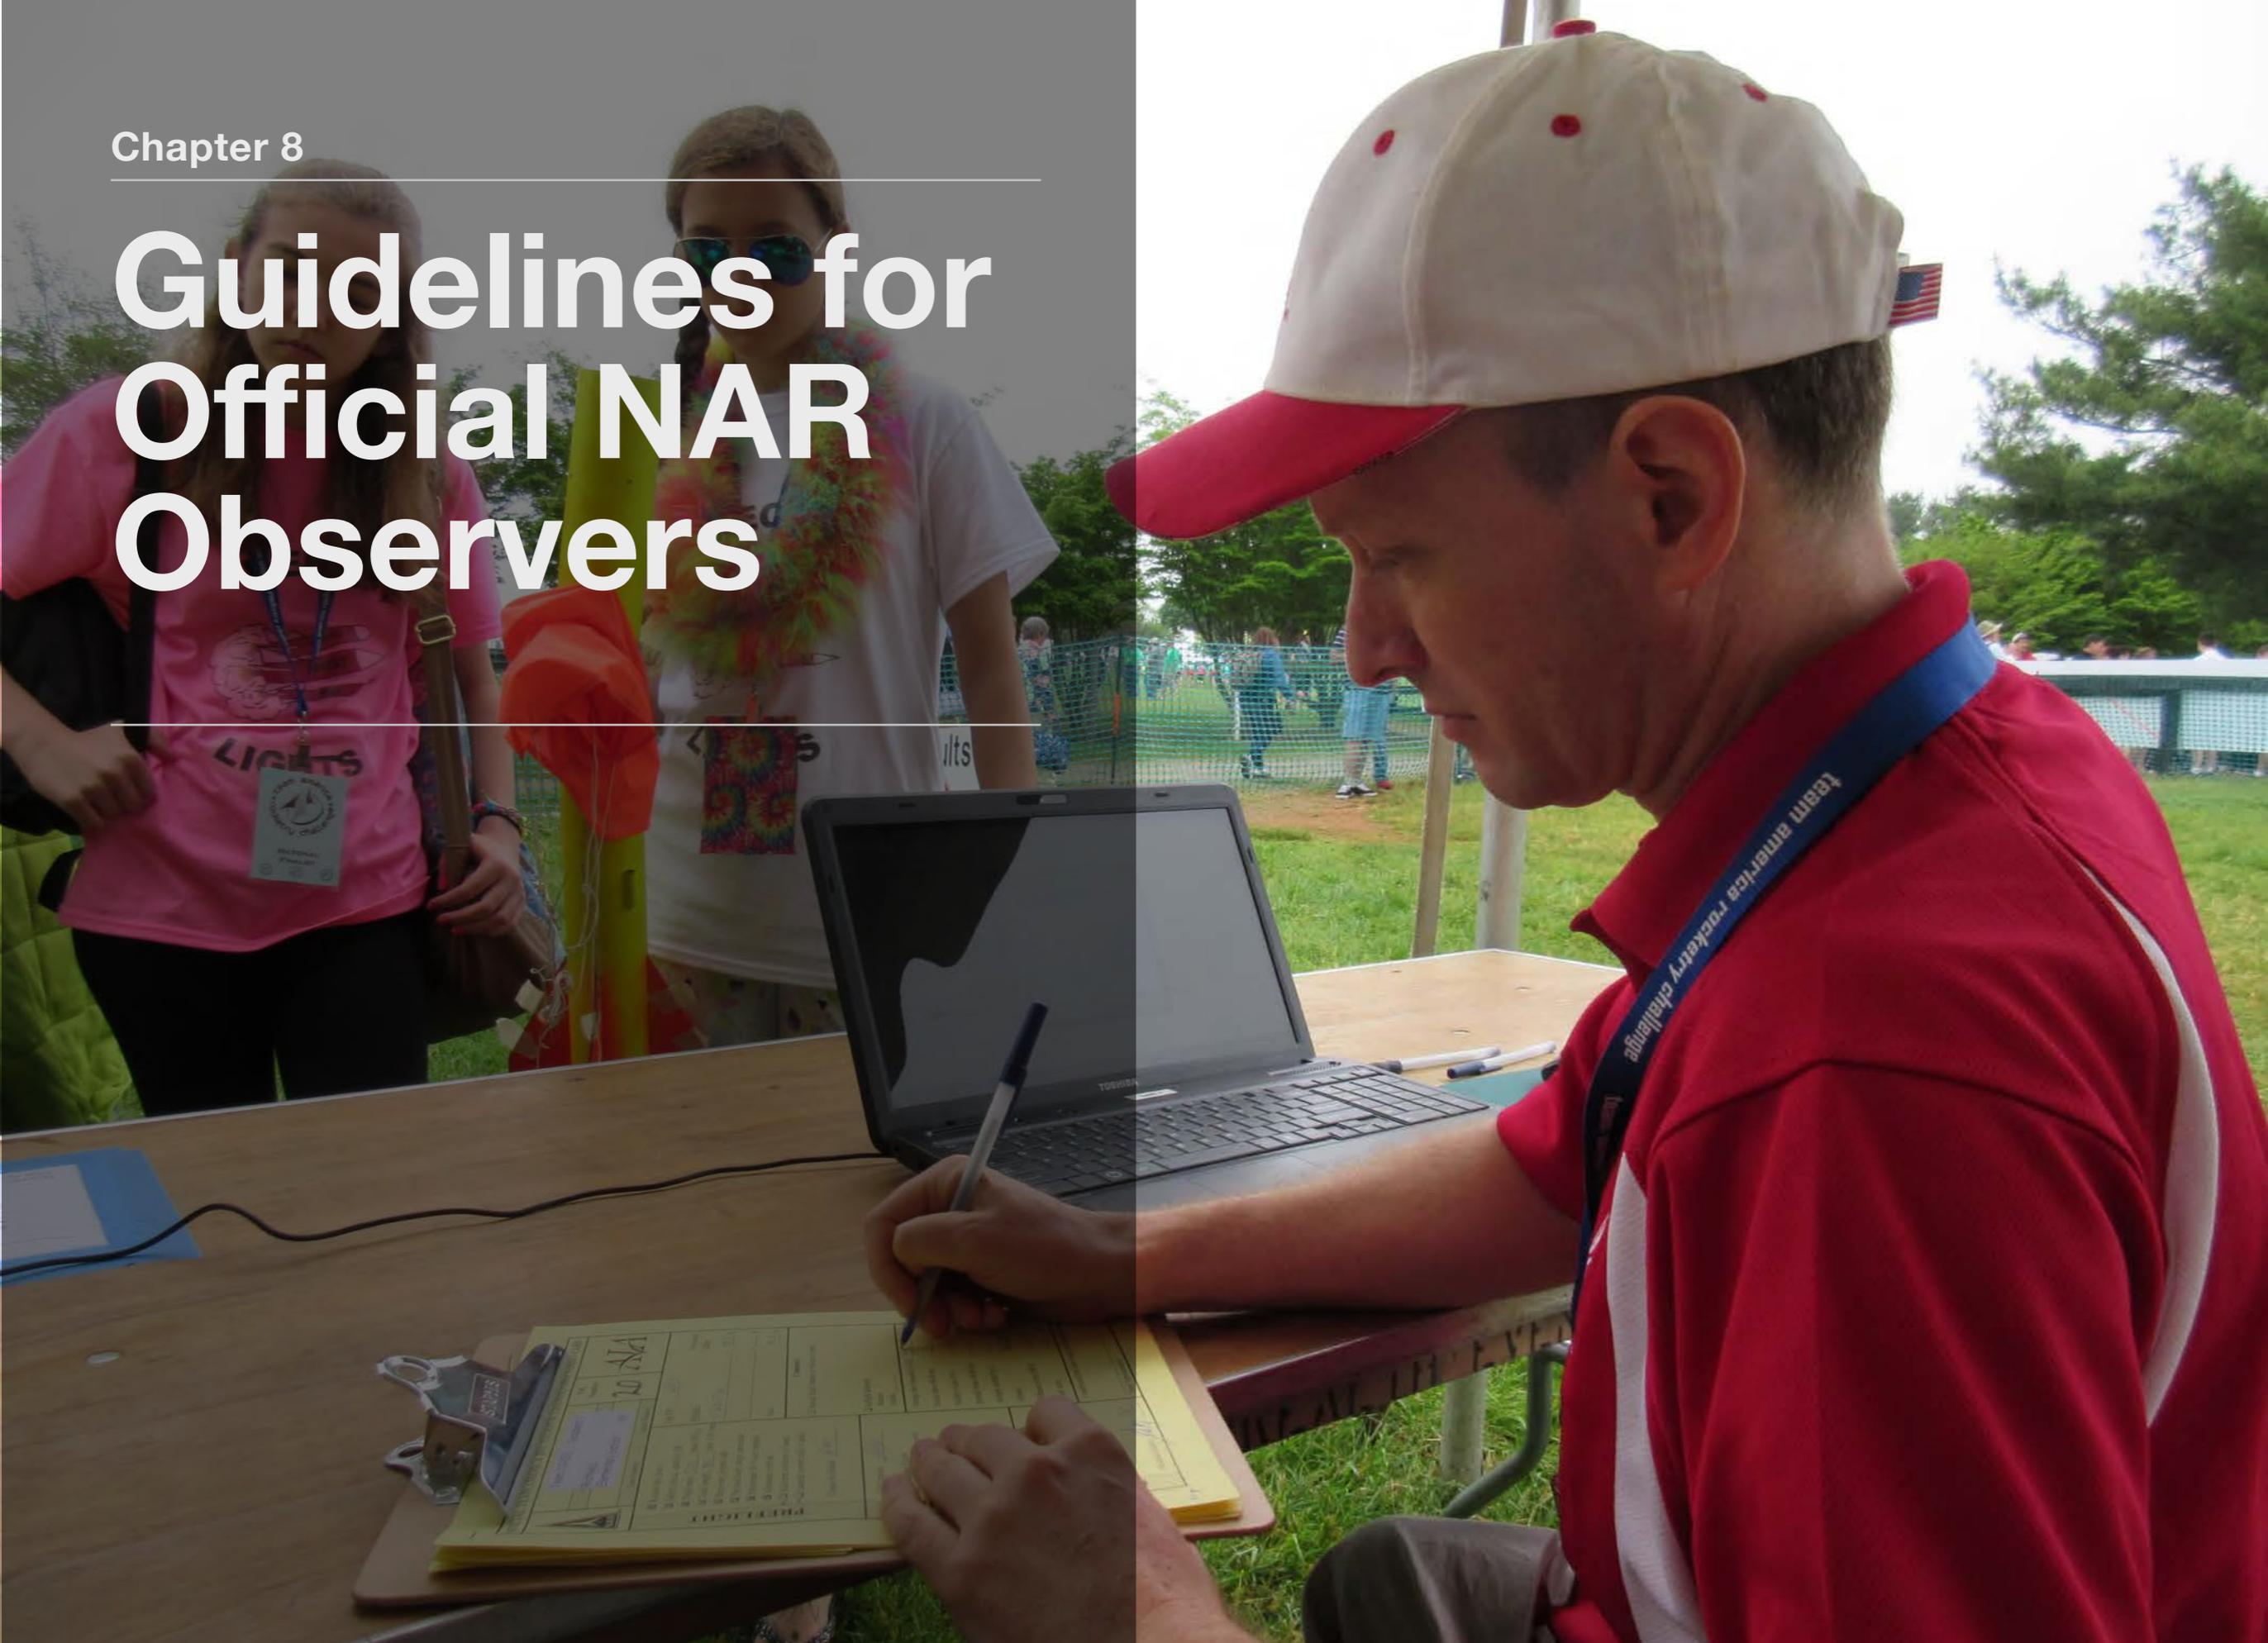

# Guidelines for Official NAR Observers

**The TARC program and the NAR count on the local NAR flight observers to be impartial and honest in the way that they score official TARC qualification flights, and to understand and enforce TARC rules and requirements consistently.** Here are some guidelines for this duty:

- 1. Be an NAR member.** You must be a current dues-paid senior (age 21 or older) member of the NAR as of the day of a flight in order to observe a flight. Membership in other organizations does not count. This is your responsibility to get right; the team trusts you and has no way to know your status. Joining or renewing online the morning of the flight, before the flight, is OK. We check observer membership status in the NAR database for every score report.
- 2. Be impartial.** You cannot be related to any member of the team or employed by the organization that sponsored the team. If you are their mentor (which is permissible, but only if there is no other choice) you must not bend any rules for “your” team.
- 3. Report all flights.** Teams only get three official qualification flight attempts. Any attempt must be reported to AIA except as

noted in #3 below: by the team if successful, by the NAR observer if a DQ. No do-overs due to disappointing performance, weather issues, etc.

- 4. All flights count.** Qualification flights must be declared before motor ignition, and must be counted and reported to AIA if the motor ignites, with the following exceptions:
  - Flights that stick on the launch pad and fire the motor without lifting off do not count.
  - Flights that experience a catastrophic motor failure do not count. Such failures are explosions that blow out either end closure or rupture the casing. Inaccurate delay times, “chuffing” ignition start-ups due to igniter mis-installation, or failures of reloadable motors due to user mis-assembly are not catastrophic failures and flights that experience these still count as official attempts.
  - Flights that land in a place too dangerous for recovery or that drift away and are not recovered on the day of flight do not count, and cannot subsequently be counted even if found, once

this basis for non-counting has been claimed by the team or declared (for safety reasons) by the NAR observer.

**5. Time accurately.** Two people must time the flight, using digital stopwatches accurate to 0.01 seconds, and one of these timers must be the official NAR observer. Timing is from first motion on the pad until the moment the first part of the rocket touches the ground (or tree or building!) or is lost from direct visibility due to distance, terrain, trees, etc.. If one timer's stopwatch malfunctions, use the single remaining time.

**6. Report the apogee altitude based on the altimeter's external signal (beeps or flashes) only.** Apogee altitudes interpreted off a digital download to a computer post-flight can be used for flight analysis, but the official altitude score must only be what the altimeter beeps or flashes.

**7. Disqualify if you have to.** If a rocket drops off a part in flight, goes unstable, streamlines in dangerously on recovery, or cracks an egg then the flight must be disqualified. The NAR observer takes custody of the score report for such flights and must send it in to AIA.



## Chapter 9

# Vendors and Web Resources

Whether this is your first time as a TARC competitor or you have several Finals behind you, you and your teammates will need rocketry supplies. Here are several sources that are all familiar with the TARC program and are committed to helping TARC competitors.



# Vendors and Web Resources

This Team Handbook is the most important resource you need to participate in this Challenge. In addition, many answers to questions on contest specifics may be found in the **Frequently Asked Questions** section on the TARC website. There are many resources that may be useful in learning the basic model rocketry skills needed to succeed in this Challenge or in getting the supplies necessary to participate. These include:



- The **National Association of Rocketry** is the nation's oldest and largest model rocket consumer organization with 170 sections or local clubs that can provide launch sites and advice. You can join NAR online, to get insurance plus NAR's magazine "Sport Rocketry". NAR Technical Services offers the official reference handbook for TARC, the Handbook of Model Rocketry by G. Harry Stine and Bill Stine

- **SpaceCAD** is an approved simulation software for TARC, and information regarding its use and other rocket design information can be found on their web site.
- **RockSIM** is an approved simulation software for TARC and is the most sophisticated of these software systems; information on its use and other rocket information can be found on the Apogee Rockets web site.
- **OpenRocket** free downloadable rocket design and simulation software.

The following are vendor-supporters of the NAR and TARC who have the rocket supplies and components needed for most TARC designs, at reasonable prices (with a TARC discount) with good customer service.

**Balsa Machining Service** (BMS), 3900 South Winchester Ave, Pahrump, NV 89048, 775-537-6232. 10% discount for TARC teams. Sells body tubes, balsa nose cones, model rocket motors, and other components for model rockets.

**Aerospace Specialty Products** (ASP), PO Box 1408, Gibsonton, FL 33534. A manufacturer of body tubes, plastic nose cones, parachutes, plastic egg-carrying capsules for rockets, and a special TARC learner's kit. 10% TARC discount.

**Heavenly Hobbies.** An online vendor of component parts and recovery devices, and a kit manufacturer.

**Wildman Rocketry.** Free “Wildman Club” membership for TARC teams, providing discounts on motors and parts.

**Estes Industries,** the largest model rocket manufacturer, offers a special parts assortment for TARC, and a discount to TARC teams on certain D and E motors.

**Hangar11 Hobbies, Inc.,** 29 Capital Drive, Washingtonville, NY 10992. (845) 304-1303. The official on-site vendor for the TARC finals.

The NAR has developed a nationwide list of experienced rocketeer mentors who are willing to be a resource to teams. A mentor is an adult rocketry expert advisor who helps a team learn basic rocketry skills and shows them where to get rocket supplies and launch sites. They can do this in person, by phone or e-mail. Teams are not required required to have mentors, and mentors are not required to be NAR-approved but there is a list of NAR-approved mentors on the TARC website for your use if desired. You may contact any mentor on the list, regardless of the state you or they live in, or you may seek online advice through the very

active NAR TARC Yahoo online group at <http://groups.yahoo.com/group/NARTARC>.



# Appendices



# Recommended Schedule of TARC Team Activities

Week 1-11 below refers to the elapsed time since team entry forms and payment were received and accepted by AIA.

## WEEK 1

- Ensure all team data (names, e-mail, etc.) on file with AIA is correct.
- Join the [TARC Yahoo group](#).

## WEEK 2

- Assign team responsibilities (such as project manager, airframe, propulsion & ignition, launch system, fundraising etc.).
- Get a mentor (see the list of available [NAR mentors](#)).
- Watch the instructional video “[How to Build and Fly a Model Rocket](#)” that is provided on the AIA’s YouTube page. (Note that there are six separate segments.)



- Download the Team Handbook & Rules (this document) and the [Frequently Asked Questions](#) from the TARC website and have all team members read both.

- Begin research on rocket parts supply sources (starting with the “[official suppliers](#)” listed in the TARC Handbook).
- Order one of the flight-simulation and rocket-design computer programs ([RockSIM](#) or [SpaceCAD](#)), at the TARC Team discount price directly from the vendor after you have registered as a TARC team, or try out the less-sophisticated downloadable freeware program [OpenRocket](#).

## WEEK 3

- Purchase an inexpensive one-stage rocket kit to familiarize your team with rocket building & flying, and build it. A good basic kit specifically for TARC teams is available from [Aerospace Specialty Products](#).

- Locate a place to fly rockets (or a nearby NAR launch to attend and fly at, see the "[Launch Windows](#)" calendar on the NAR website or contact the [nearest NAR club or section](#)).

- Develop a plan to raise required funds for purchase of rocket supplies covering at least 2 rockets and motors for at least 10 test and qualification flights and potentially for travel to the Finals.

#### **WEEK 4**

- Obtain a comprehensive book on model rocketry, such as G. Harry and Bill Stine's *Handbook of Model Rocketry* (available through the [NAR Technical Services](#) webstore), and have all team members read it.

- Load the rocket design and flight simulation computer program that you purchased, and have team members learn to use it.

- If you require "site owner" insurance for the place where you will be flying, have the teacher and at least three team members join the NAR, and order NAR site owner insurance.

#### **WEEK 5**

- Fly a basic one-stage model rocket.

- Order your official TARC altimeter from [Perfectflite](#).

#### **WEEK 6**

- Using the computer program and the knowledge gained from reading and from building and flying basic rockets, develop a first design for TARC entry.

#### **WEEK 7**

- Using the computer program, conduct flight simulations of your design with various rocket motors on the [TARC approved motor list](#), to determine the best motor(s) to use.

- Locate sources for the materials needed to build the TARC design (starting with the [official vendors](#) in the TARC Handbook) and purchase required parts and rocket motors.

#### **WEEK 8**

- Design and build (or purchase) the electrical launch system and the launch pad (rod or rail) to be used with your TARC entry, if you do not have a local rocket club's system available for your use.

## WEEK 9

- Begin construction of your initial design for your TARC entry.
- Locate a NAR Senior (adult) member who can serve as your official observer for your qualification flights, if you do not already have an NAR Mentor who will do this.

## WEEK 10

- Develop a pre-flight checklist for your TARC flight and assign responsibility for each of the duties to a member of the flight team.
- Test your launch system by test-firing igniters without installing them in rocket motors.

## WEEK 11

- Weigh your completed TARC rocket and re-run computer flight simulations with actual rocket weights.

**By February 1 you should (but are not required to):**

- Test-fly your initial TARC design (without altimeter), making sure that you leave time to redesign, rebuild, and re-fly by April 4 if this initial flight/design is not successful!

- If your first flight is fully successful, test-fly again with stopwatch timing and the altimeter installed. Repeat test flights until you hit the design targets.

- If your first flight is not successful, do post-flight failure analysis and re-design.

**By March 1 you should (but are not required to):**

- Make your first official qualification flight attempt in front of an NAR Senior member observer

**By March 4:**

- Your application for the TARC Outreach Program must be received by this date to receive consideration.

**NO LATER THAN April 4 you must:**

- Make your final official qualification flight attempt in front of an NAR Senior member observer.

- Submit your qualification flight report to AIA using the TARC portal, by fax, or by email.

## April 8

- If notified of selection to attend the Finals, make reservations at one of the TARC hotels identified by the organizers and conduct fund-raising to cover travel and lodging.
- Continue test-flying to fine tune rocket design to target altitude.
- If you plan to travel to the Finals by airline, order rocket motors for the Finals to be shipped to TARC receiving point at Aurora Flight Sciences or delivered on-site by the official Finals vendor, Hangar11 Hobbies.

## NO LATER THAN May 1

- Complete and test-fly the actual rocket to be used in the Finals. This Finals rocket must have been test-flown before arrival at the Finals, as there is no opportunity for test-flying at the Finals site.



*2010 Team America Rocketry Challenge winners Penn Manor (PA) High School with NASA Administrator Charles Bolden.*

# NAR Model Rocket Safety Code

*Revision of August 2012*

**1. Materials.** I will use only lightweight, non-metal parts for the nose, body, and fins of my rocket.

**2. Motors.** I will use only certified, commercially made model rocket motors, and will not tamper with these motors or use them for any purposes except those recommended by the manufacturer.

**3. Ignition System.** I will launch my rockets with an electrical launch system and electrical motor igniters. My launch system will have a safety interlock in series with the launch switch, and will use a launch switch that returns to the "off" position when released.

**4. Misfires.** If my rocket does not launch when I press the button of my electrical launch system, I will remove the launcher's safety interlock or disconnect its battery, and will wait 60 seconds after the last launch attempt before allowing anyone to approach the rocket.

**5. Launch Safety.** I will use a countdown before launch, and will ensure that everyone is paying attention and is a safe distance of at least 15 feet away when I launch rockets with D motors or smaller, and 30 feet when I launch larger rockets. If I am uncertain about the safety or stability of an untested rocket, I will check the stability before flight and will fly it only after warning spectators and clearing them away to a safe distance. When conducting a simultaneous launch of more than ten rockets I will observe a safe distance of 1.5 times the maximum expected altitude of any launched rocket.

**6. Launcher.** I will launch my rocket from a launch rod, tower, or rail that is pointed to within 30 degrees of the vertical to ensure that the rocket flies nearly straight up, and I will use a blast deflector to prevent the motor's exhaust from hitting the ground. To prevent accidental eye injury, I will place launchers so that the end of the launch rod is above eye level or will cap the end of the rod when it is not in use.

**7. Size.** My model rocket will not weigh more than 1,500 grams (53 ounces) at liftoff and will not contain more than 125 grams

(4.4 ounces) of propellant or 320 N-sec (71.9 pound-seconds) of total impulse.

**8. Flight Safety.** I will not launch my rocket at targets, into clouds, or near airplanes, and will not put any flammable or explosive payload in my rocket.

**9. Launch Site.** I will launch my rocket outdoors, in an open area at least as large as shown in the accompanying table, and in safe weather conditions with wind speeds no greater than 20 miles per hour. I will ensure that there is no dry grass close to the launch pad, and that the launch site does not present risk of grass fires.

**10. Recovery System.** I will use a recovery system such as a streamer or parachute in my rocket so that it returns safely and undamaged and can be flown again, and I will use only flame-resistant or fireproof recovery system wadding in my rocket.

**11. Recovery Safety.** I will not attempt to recover my rocket from power lines, tall trees, or other dangerous places.



*NAR volunteer range crew at the 2015 Team America Rocketry Challenge.*

## LAUNCH SITE DIMENSIONS

Installed Total Impulse	Equivalent Motor Type	Minimum Site Dimensions (ft.)
0.00-1.25	1/4A, 1/2A	50
1.26-2.50	A	100
2.51-5.00	B	200
5.01-10.00	C	400
10.01-20.00	D	500
20.01-40.00	E	1,000
40.01-80.00	F	1,000
80.01-160.00	G	1,000
160.01-320.00	Two Gs	1,500

# List of TARC-Approved Model Rocket Motors

**List updated as of August 6, 2015.** The commercially-made model rocket motors listed below have been subjected to rigorous safety and reliability testing conducted by the NAR Standards & Testing (S&T) Committee and are the only ones approved for sale in the U.S. or for use in this Challenge. All motors listed here are in current production. Every motor listed here will continue to be approved for use in the Team America 2016 event regardless of any subsequent announced changes to the NAR's overall official engine certification list. This list may be expanded if new motors are certified during the period of the Challenge; this expansion and any revised list will be communicated to all those teams enrolled in the Challenge.

You may download the "[Motor Data Sheets](#)" from the NAR web site if you desire additional information on any specific motor. Each data sheet contains a thrust curve together with values from a test firing, including measured average thrust and total impulse, plus 32 data points for use in altitude simulation computer programs.

Note: (R) following the listed casing dimension denotes that the motor is a reloadable motor system certified only with the

manufacturer-supplied casing, closures, nozzle, and propellant. Reloadable motors are not available for sale to persons under age 18, per U.S. Consumer Products Safety Commission regulations and there are special restrictions on their use in California. Also, the metal casings that reloadable motors use are quite expensive. But if the performance of these types of model rocket motor happens to be exactly what you need for your design, your supervising teacher/adult advisor can purchase them and supervise your use of them.

Manufacturers of E and F motors often use letter codes right after the motor average thrust value on the label (e.g. the "FJ" in an F23FJ motor type) which designate the type of that manufacturer's propellant used in the motor. This code, or the absence of a code, does not affect status of certification for TARC use.

Motors with "sparky" propellant or with an average thrust higher than 80 N are officially classified as "high power motors" even if their total impulse is in the F power class or below, and such motors are not listed or approved for use in TARC. Motors that are no longer in production are also not listed and may not be used.

Designation	Manufacturer	Casing Size (mm)	Propellant Mass (grams)	Total Impulse (N-sec.)
1/4A3-3T	Estes	13x45	0.8	0.62
1/2A3-2T, -4T	Estes	13x45	2.0	1.25
1/2A6-2	Estes	18x70	2.6	1.25
A3-2T, -4T	Quest	13x55	3.6	1.71
A3-4T	Estes	13x45	3.3	2.50
A6-4	Quest	18x70	3.0	2.30
A8-0, -3, -5	Estes	18x70	3.3	2.50
A10-0T	Estes	13x45	3.6	1.88
A10-3T, PT	Estes	13x45	3.8	2.50
B4-2, -4	Estes	18x70	6.0	5.00
B6-0	Estes	18x70	5.6	4.90
B6-2, -4, -6	Estes	18x70	5.6	5.00
B6-0, -2, -4	Quest	18x70	6.5	5.00
C6-0, -3, -5, -7	Estes	18x70	10.8	9.00
C6-0	Quest	18x70	11.0	8.80

Designation	Manufacturer	Casing Size (mm)	Propellant Mass (grams)	Total Impulse (N-sec.)
C6-3, -5	Quest	18x70	12.0	8.76
C11-0, -3, -5, -7	Estes	24x70	12.0	9.00
D5-P	Quest	20x88	25.0	19.60
D5-4, -6	Quest	20x96	24.0	17.60
D9W-4, -7 (R)	Aerotech	24x70	10.5	20.00
D10-3, -5, -7	Apogee	18x70	9.8	18.30
D10-3, -5, -7	Aerotech	18x70	9.8	18.30
D11-P	Estes	24x70	24.5	18.00
D12-0, -3, -5, -7	Estes	24x70	21.1	17.00
D13W-4, -7, -10 (R)	Aerotech	18x70	9.8	20.00
D15T-4, -6/7 (R)	Aerotech	24x70	8.9	20.00
D21T-4, -7	Aerotech	18x70	9.6	20.00
D24T-4, -7 (R)	Aerotech	18x70	8.8	18.50
E6-4, -6, -8, P	Apogee	24x70	22.0	37.80

Designation	Manufacturer	Casing Size (mm)	Propellant Mass (grams)	Total Impulse (N-sec.)
E9-4, -6, -8, P	Estes	24x90	35.8	28.50
E11J-3 (R)	Aerotech	24x70	25.0	31.70
E12-0, -4, -6, -8	Estes	24x95	35.9	27.20
E15W-4, -7, P	Aerotech	24x65	20.1	35.00
E16-0, -4, -6, -8	Estes	29x114	40.0	33.4
E16W-4, -7 (R)	Aerotech	29x124	19.0	40.00
E18W-4, -8 (R)	Aerotech	24x70	20.7	39.00
E20-4, -7, -10	Aerotech	24x65	16.2	35.0
E22SS-13A (R)	Cesaroni	24x69	13.4	24.2
E23T-5, -8 (R)	Aerotech	29x124	17.4	37.00
E28T-4/5. -7/8 (R)	Aerotech	24x70	18.4	40.00
E30T-4, -7	Aerotech	24x70	17.8	33.60
E30-4, -7	Estes	24x70	17.8	33.60
E31WT-15A	Cesaroni	24x69	11.2	26.1
E75VM-17A (R)	Cesaroni	24x69	10.4	24.80

Designation	Manufacturer	Casing Size (mm)	Propellant Mass (grams)	Total Impulse (N-sec.)
F10-4, -6, -8	Apogee	29.93	40.0	74.30
F12J-2/3, -5 (R)	Aerotech	29x93	30.0	45.00
*F15-0, -4, -6, -8	Estes	29x114	60.0	49.60
F20W-4, -7	Aerotech	29x73	30.0	51.80
F22J-4/5, -7 (R)	Aerotech	29x124	46.3	65.00
F23FJ-4, -7	Aerotech	29x83	30.0	41.20
F24W-4, -7 (R)	Aerotech	24x70	19.0	50.00
F25W-4, -6, -9	Aerotech	29x98	35.6	80.00
F26FJ-6, -9	Aerotech	29x98	43.1	62.20
F26FJ-6	Estes	29x98	43.1	62.20
F27R-4, -8	Aerotech	29x83	28.4	49.60
F29-12A (R)	Cesaroni	29x98	30.9	54.80
F30-4, -6, -8	Aerotech	24x90	31.2	47.00
F30WH/ LB-6A (R)	Cesaroni	24x133	40.0	73.10
F31CL-12A	Cesaroni	29x98	25.7	55.50
F32T-4, -6, -8	Aerotech	24x90	25.8	56.90

Designation	Manufacturer	Casing Size (mm)	Propellant Mass (grams)	Total Impulse (N-sec.)
F32WH-12A (R)	Cesaroni	24x98	29.9	52.80
F35W-5, -8, -11 (R)	Aerotech	24x95	30.0	57.10
F36SS-11A (R)	Cesaroni	29x98	29.5	41.20
F36BS-14A (R)	Cesaroni	29x98	25.6	51.50
F37W-S, -M, -L (R)	Aerotech	29x99	28.2	50.00
F39T-3, -6 (R)	Aerotech	24X70	22.7	50.00
F40W-4, -7, -10 (R)	Aerotech	29X124	40.0	80.00
F42T-4, -8	Aerotech	29X83	27.0	52.90
F44W-4, -8	Aerotech	24x70	19.7	41.50
F50T-4, -6, -9	Aerotech	29x98	37.9	80.00
F50T-4, -6	Estes	29x98	37.9	80.00
F51BS-13A (R)	Cesaroni	24X101	22.0	49.90
F51CL-12A (R)	Cesaroni	24x133	33.0	75.00
F52T-5/6, -8, -11 (R)	Aerotech	29x124	36.6	78.00
F59WT-12A (R)	Cesaroni	29x98	26.1	57.00

Designation	Manufacturer	Casing Size (mm)	Propellant Mass (grams)	Total Impulse (N-sec.)
F62T-S, -M, -L (R)	Aerotech	29x89	30.5	51.00
F70WT-14A (R)	Cesaroni	24x101	22.5	52.9
F79SS-13A (R)	Cesaroni	24x133	40.1	67.80

**Additional note:**

- The manufacturer-reported total impulse and propellant mass of motors often differs from the values reported above, which are based on testing by the NAR Standards & Testing Committee. The values above are the ones that will be used in TARC. These motor designations are marked with an asterisk (\*).

# Tips for Parachutes

All rocket recovery devices are designed to produce aerodynamic drag to slow the descent of the rocket once they are deployed. The drag on a falling object increases as the square of its velocity. When a descending rocket stabilizes at terminal velocity, the drag forces on all the connected parts of the descending rocket at that velocity exactly offset its weight and its acceleration becomes zero. No matter how far it falls after this, the rocket's descent velocity will not further increase. The heavier a rocket, the higher this terminal velocity will be. The larger and more "draggy" a rocket is in its recovery configuration, the lower this terminal velocity will be.

For TARC 2016, if your rocket goes up 850 feet and takes 7 seconds after liftoff to reach this altitude and deploy its parachute, and you want the total flight duration to be 45 seconds, then the descent terminal velocity that you want is  $850 / (45 - 7) = 22$  feet/second. The heavier the rocket, the more drag it will need on recovery to achieve a velocity this small. Higher recovery drag is easy to achieve with a parachute, just make it bigger in diameter. The factors other than size that affect how a parachute performs (how much drag it has) include:

- Weight of the rocket hanging under the parachute
- Shape
- Length of shroud lines
- Number of shroud lines
- Type of material (fabric vs plastic)
- Size of "spill hole" in the center of the parachute

There are two ways that teams can get parachutes: make buy a premade chute of the appropriate size from one of the many parachute vendors servicing the rocketry hobby; or make a parachute yourself from scratch. The former is easier, the latter is cheaper. We will discuss both.

Some of the vendors who make rocket parachutes are listed below. Remember that under the TARC rules you cannot get a commercial parachute (or any other part of your rocket) custom-made to your specifications, you have to buy and use a standard-stock item available to all.

## Aerospace Specialty Products


Sunward Aerospace (also sold via Apogee Components)

## Rocket Chutes

Top Flight Recovery (sold via Balsa Machining Service)

Making your own parachute is a bit more work than buying one. Model rocket parachutes can either be sewn from nylon fabric or cut out of thin flexible plastic film. Since these parachutes will be absorbing a significant opening shock from the weight of a TARC rocket, if a plastic film is used it needs to be sturdy enough not to tear easily. Black garbage bags (3 mil thickness) are a great material; dry cleaner bags are too thin. And the shroud lines need to be strong (40+ pounds of breaking strength, nylon or Kevlar) attached very securely, not just by discs of tape on the edges of the canopy. Typically model rocket competition fliers use a reinforcing technique called “over-the-top shroud lines” where the shroud lines are run across the center of the parachute and held in position with adhesive discs or squares of Band-Aid tape so that these lines, and not the plastic of the canopy material, take the full shock of the parachute’s opening.

See the diagram here for an example of how this is done.

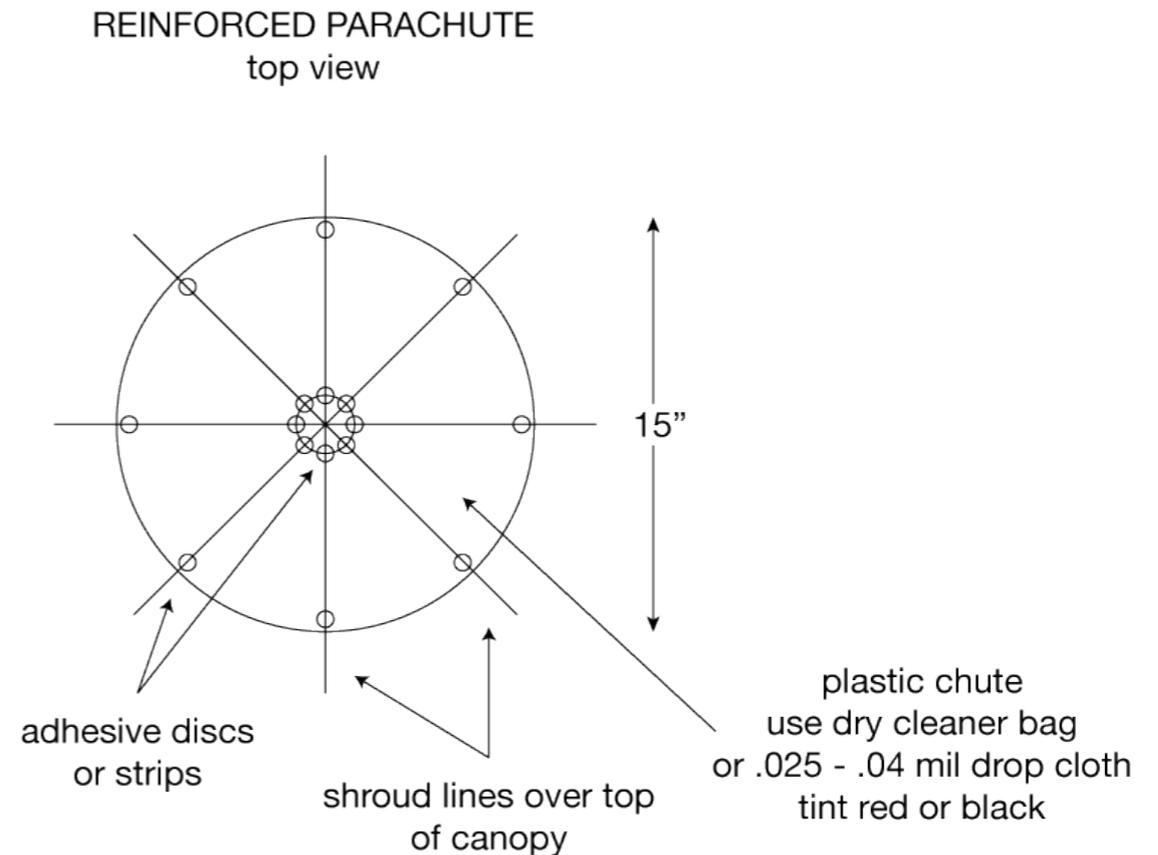

# PerfectFlite Maximum Altitude Altimeters

*TARC APRA, Pnut, and Firefly altimeters are available from [Perfectflite Electronics](#), P.O. Box 29, Andover, NH 03216 (603) 735-5994*

**Description:** The altimeters approved for use in TARC 2016 (the Perfectflite APRA, Pnut, or Firefly models) are "maximum altitude altimeters" that precisely measure the air pressure at the altitude where your rocket is located every 0.05 seconds and convert this to an above-ground altitude value. The altimeter senses the liftoff of the rocket from the sudden air pressure drop that results from its altitude change, then senses the maximum altitude that the rocket subsequently reaches, and "freezes" and beeps out this maximum altitude thereafter using a piezoelectric buzzer, until the battery is removed to turn it off. It will not work on flights that achieve less than 160 feet altitude above ground level. It is accurate to better than 1 percent of the measured altitude, which is far better accuracy than any other altitude-measurement technique readily available to hobby rocketeers.

**Using the altimeter:** Read and follow the detailed manufacturer usage instructions provided with the altimeter. Always handle them by the edges when testing or installing to avoid touching

any of the circuitry. Never store the device bare in a clear plastic bag; use a small cardboard box, or wrap the altimeter in a paper towel inside a plastic bag. Do not use tape on the altimeter, and use care to keep it clean and dry. Protect it from the fumes and residue created by rocket motors and their ejection charges by installing it in a compartment of your rocket that is totally sealed from motors and charges. Make sure that it cannot "rattle around" in this compartment and get damaged in flight. If the altimeter has a battery holder always mount the altimeter with the spring end of the battery holder facing upward toward the nose end of the rocket. This will avoid compression of the spring and battery disconnection during a very high acceleration liftoff.

The altitude achieved by the rocket (and the altitude read by the altimeter) depends on launch site altitude and air temperature. If you live at an altitude much different from the Team America launch site (600 feet above sea level), or fly when the temperature much different from the temperature on "fly-off" day in May, your rocket will go to a different altitude (and the altimeter will read a different altitude) than it will at the fly-off. You need to compensate for this. The flight-simulation programs (such as

RockSim) have user inputs for ambient air temperature which will accurately adjust predicted altitude for its effect on aerodynamic drag on the rocket (rockets go higher in the thinner air of hotter days).

In addition, the computation algorithm inside the altimeter that converts measured air pressure changes during flight into flight altitude is based on the assumption that ambient temperature at the ground is 58 degrees F. If the temperature is different from one flight to the next, the altimeter-calculated altitude will change even if the flights go to precisely the same geometric altitude. This effect is almost exactly one percent per five degrees F – with colder air temperatures leading to higher calculated altitudes (the opposite effect of temperature on aerodynamic drag). No manual post-flight adjustment for temperature is permitted in calculating or recording TARC official altitude scores, so if you want to hit the same altimeter-reported altitude on flights flown at different temperatures you will have to make appropriate allowance in rocket weight for both this altimeter calculation effect and the aerodynamic drag effect.

An altimeter must be mounted in a "sealed" chamber which must have a vent hole or holes to the outside. A sealed bulkhead below the altimeter chamber is necessary to avoid the vacuum caused by the aft end of a rocket during flight. A sealed bulkhead above the altimeter chamber is necessary to avoid any pressure fluctuations that may be created at the nose end of the rocket. If

the front of the payload section slip fits to another section such as a nosecone, then the fit must be as free as possible from turbulence. A breathing hole or vent (also known as a static port) to the outside of the rocket must be in an area where there are no obstacles above it that can cause turbulent air flow over the vent hole. Do not allow screws, ornamental objects, or anything that protrudes out from the rocket body to be in line with and forward of a vent hole. Vents must be neat and burr free and on an outside surface that is smooth and vertical where airflow is smooth without turbulence.

It is better to use multiple (preferably four) static ports (vent holes) instead of just one. Never use two. Very strong wind blowing directly on a single static port could affect the altimeter. Multiple ports evenly spaced around the rocket tube may help cancel the effects of strong wind on the ground, the effects of transitioning through wind shears during flight, the pressure effects of a non-stable liftoff, or the pressure effects that occur due to flipping and spinning after deployment. Ports must be the same size and evenly spaced in line around the tube. For most TARC rockets the best configuration is four 0.02" holes (and no bigger than 1/32") spaced at 90 degree intervals around the circumference of the body tube. Using a larger hole will increase wind noise on the data. It will also increase the likelihood and magnitude of spikes in the data when the rocket separates, which can affect the apogee reading. Since the goal of the contest is consistency, clean data is essential. In order to get the cleanest data, the

sampling holes should NOT be oversized, and ejection should be slightly after apogee so any turbulence-induced noise on the data will not spike up over the true apogee height.

If the altimeter is reporting an altitude of some very small value (a number less than 160, the launch detect trigger altitude) post-flight, this is a result of it getting a brief (approximately 0.1 second) vacuum spike due to a wind gust over the vent hole or other causes. The altimeter would see the altitude going from 0 to over 80 to 160 in 0.1 second (more than 800 feet per second, obviously not a valid reading around apogee) so the spike itself would be excluded from the beeped out apogee reading. Any small number that the altimeter does beep out (4, 8, 12...) would just be the result of background or wind-induced noise.

After power is applied to the altimeter you have approximately 25 seconds to install it and close the rocket before it begins looking for a pressure change to signify launch. If you are handling the altimeter after the 25 second period has elapsed, you could trigger it prematurely. When the altimeter is putting out the periodic "launch ready" chirp/flash it is sensitive to handling, wind gusts, and light in the sensor hole. The altimeter should be safely inside the rocket with the altimeter compartment closed before this occurs.

If the altimeter remains silent post-flight, there are a number of possibilities. First is a weak battery. Battery voltage must be at

least 11 volts (for the APRA) or 3.7 volts (for the Pnut). Second is dirty battery contacts or battery holder contacts (on the APRA). If the altimeter starts beeping again when the battery is rotated a turn or two in the battery holder of an APRA it would indicate that the contacts were dirty. Clean with an eraser and blow out debris. Third is that the battery lost contact briefly during flight (again just for the APRA; shock at motor ignition or ejection are the most likely times, especially if the altimeter is free-floating in a compartment and can slam around, which is a bad practice). The altimeter should be padded to protect it from shock, the battery holder should be inspected for cracks from previous crashes which could loosen the battery retention force, and the altimeter should be installed with the spring end of the battery holder facing "up" so the spring is not compressed during acceleration.



# TARC Outreach Program



**The best advocates for TARC are the students that participate in the program!** To keep TARC going and growing we need your help to spread the word, so we are offering a prize for the team that is TARC’s biggest advocate through this “TARC Outreach Program”. Here is how it works:

TARC offers a 101st spot at the National Finals for a team that did not make the Finals score cutoff but did the best job at spreading the word about TARC to their peers and community. In order to qualify for this bonus spot, the team must:

- 1) Submit at least two valid qualification flight score reports by the April 4, 2016 deadline. DQs do not count.
- 2) Submitted an outreach application that was received no later than **March 4, 2016**.

The 101st team selection will be announced on April 8, 2016 in connection with the announcement of the 100 teams that made the Finals by their flight scores. We will also be awarding a special prize at the National Finals to the team with the best overall outreach program. Teams in the top 100 are eligible for

this award too, so submit an application, even if you expect to make it to the Finals based on your qualifying scores!

## Outreach Program Details

- **Mission:** Spread the word about TARC, about the National Association of Rocketry, and about how awesome science, technology, engineering, and math can be. Use mass contact, recruitment, education, and anything else you can come up to promote TARC.
- **Scoring:** Team outreach efforts will be evaluated holistically by a panel of judges drawn from our educational partners and sponsors. Teams will be evaluated in four areas, with each area equally weighted.
- **Quality:** How substantively did you engage with your audience? Getting ten people to show up to a rocket-building demonstration would be worth more than tweeting to ten followers
- **Reach:** How many people did your outreach efforts contact? How many times did you reach them?

- **Impact:** What happened as a result of your outreach efforts? Did you convince a new team to join TARC, did your School Superintendent come to watch your qualification flight?
- **Creativity:** What new and novel ways did you spread the word? Have fun with your outreach!

**How to apply:** Fill out the application form posted on the TARC website. Send us the application form, along with whatever documentation you collected over the course of the year. Where necessary, include a brief description of how an event met each of the four judging criteria.

You can submit your application to us either by [email](#) or by mailing it to:

Miles Lifson  
Aerospace Industries Association  
1000 Wilson Blvd., Suite 1700  
Arlington, Virginia 22209 USA

There is no specific form or required length for your application. We just want to get a sense of your outreach efforts. In the past we have had teams submit videos, press clippings, newsletter articles, and more. **Make sure to submit your application is received no later than March 4, 2016.**

**Prizes:** The team with the best TARC Outreach Program score that submitted a valid qualifying score (sorry, DQs do not count) but did not make the top 100 teams by flight score will earn a spot to compete in the National Finals—and will be eligible to compete for prize money just like all the other teams. We will also be awarding a cash prize at the National Finals to the team with the best overall outreach program—teams in the top 100 are eligible for this award, too.

### **Education and Outreach Resources**

So you want that 101st spot, but where do you start in putting together an outreach program? In previous years NASA has challenged college students to develop a similar outreach program through [Student Launch](#). Check out what these teams did to get some ideas on where you can go with this project:

[Mississippi State University](#)

[University of Alabama](#)

Here are some other suggested ways to do outreach:

- **Mass communication**
- **Twitter:** Make sure you use the #rocketcontest hashtag so we can track you!
- **Facebook:** Make sure you tag us in your post! Team America Rocketry Challenge (TARC)

- **Brochures:** Make sure you include the TARC website and information about the program and local launches!
- **Recruitment:** Get a new team to join TARC, it could be from your school or elsewhere in your community. You might even recruit new NAR members. These could even be your teammates!
- **Education:** Develop a lesson plan or presentation. Execute your lesson plan for a classroom of students or deliver your presentation. It might be to a community group, your school board, or at a school assembly.

If you decide to make a presentation or lesson plan and need some ideas outside of your TARC experience, try some of the resources listed below from the NAR website's "[Teacher and Youth Group Leader Resources](#)" page or from the online version of the NAR's [Educator Resource CD](#).

- NASA's "[Adventures in Rocket Science Educators' Guide](#)" which has a range of educational programs and low-cost hands-on activities for young students.
- "[This is Rocketry](#)", a presentation on the basics of rocketry and the NAR
- A whole [STEM curriculum](#) for teachers based around using TARC

- A pamphlet on "[Successful Rocketry for Scouting, 4-H and Other Youth Groups](#)"

Three rocket manufacturers also have good online resources suitable for use in presentations:

[Estes Industries](#)

[Apogee Components](#)

[Quest Aerospace](#)

NASA Glenn Research Center has an [online directory](#) of rocket education resources.

The NAR also has resources for you to use for recruiting new NAR members:

- Recruiting a team to the NAR and need to know about [membership?](#)
- Have a team ready to [join the NAR?](#)

# Fund Raising

**Participation in TARC generally requires a team to raise between \$500 and \$1000, not counting the costs for travel to the National Finals.** We want to provide you with some ideas to help you get going in your efforts to raise funds for TARC supplies and other related expenses. Below are some things that other teams have done successfully in the past.

- Host an event and charge admission. Carwashes, concerts, pasta dinner, pancake breakfast, bake sale, garage sale, rocket demonstration, etc. Be creative!

- Participate in organized fund raising activities - school sports concession stands, restaurant fundraiser nights, Krispy Kreme donuts, entertainment books, raffle tickets, candy or gift wrapping, calendars, flowers or wreaths.



- Contact local businesses for donation of parts and materials for the construction of your rocket designs - places such as hobby shops, hardware stores, home supply/construction, etc. Teams in

the past have gotten things such as carpeting remnants, foam padding and a multitude of other supplies donated simply by asking. Often local stores may offer you a discount, so be sure to ask about that as well.

- Sell decal logo spots on your rockets. This is a great way to fund your team's participation in the Team America Rocketry Challenge and an easy way for you to give your sponsors something tangible in return for their financial support.

Be sure to remind your sponsors

that their logos may get national as well as local media coverage if you qualify for the finals or even win the contest!

- Ask people and groups directly to support your team financially. Think about the organizations, businesses or people in your community that are supportive of education and technology. These are good places to start. You may need to do a little research and brainstorm with your teacher supervisor and family members to come up with some good leads. Log into the TARC portal to find a sample fund raising packet.

- Create a team press release and submit it to your local area media (you can find a sample press release in the Team Tool Kit). This is a great way to alert people in your community to your activities and get them interested in what your team is doing!

If you have a unique fundraiser, let us know! Tweet at us (@rocketcontest), post it to our Facebook page, or email it to us at [rocketcontest@aia-aerospace.org](mailto:rocketcontest@aia-aerospace.org).



*French Prime Minister Manuel Valls greets the members of the Russellville (AL) City Schools rocket team following their victory at the 2015 International Rocketry Challenge, held at the Paris Air Show.*

# NAR Rocket-Flying Insurance FAQ

**1. What activities does NAR individual insurance cover?** NAR insurance is general liability coverage included as part of NAR membership benefits. Individual insurance covers the insured NAR member for accident losses solely arising out of NAR sport rocketry activities, including both model and high power rockets. It protects the owner of the model in the event his rocket causes damage or injury to the person or property of another.

**2. What are the coverage limits of the insurance?** The NAR policy limit is \$5,000,000 per occurrence and \$5,000,000 aggregate per annum.

**3. What are the deductibles for the insurance?** The NAR policy has a \$5,000 deductible per Bodily Injury & Property Damage Claim. Members are personally responsible for payment of the first \$1,000 of the deductible. If a member is responsible for more than one claim in any NAR policy period, they will be responsible for the entire amount of the NAR deductible. In the event of a claim filing, failure to pay the deductible may be cause for the loss of membership benefits.

**4. When do NAR insurance benefits kick in on a claim?** NAR individual insurance is primary coverage, meaning it applies before other applicable coverage you might have (such as a homeowners' policy).

**5. If my rocket hurts someone at a club launch (with or without my own stupidity contributing to the accident) does the NAR insurance cover it completely?** NAR insurance will cover individual members up to the existing limits in the policy (up to \$5 million annually). However, "stupidity" in disregarding any part of the NAR Safety Codes is never covered. Your insurance is void if you violate the NAR Safety Codes.

**6. If I get hurt at an NAR sponsored activity, does the NAR insurance cover medical expenses?** Yes. The NAR policy has a medical payments provision for accidents during NAR operations. The applicable limit for this coverage is \$5,000. This would also apply if a fellow club member were to be injured. Other medical insurance coverage you possess must be exhausted first.

**7. My Team has non-NAR-members attending our launch. Are they covered by NAR insurance when they fly with us?** Only if they are at a launch sponsored by a “section” or club of NAR. At NAR section launches, all registered members of a TARC team are covered. Otherwise flights by non-members are not covered by NAR insurance. To obtain coverage, they must join and become members of NAR.

**8. Does this cover rocket-related injuries only? What if I trip over a hole on the launch field and break a leg?** Coverage applies to losses arising out of NAR sport rocketry activities. "Activity" would include meetings, launches, etc. An injury on the premises of such an activity would be part of the activity.

**9. Does the NAR insurance cover property damage? If my rocket damages a car is this covered?** Are we covered if a rocket hits a house and causes damage? Property damage to "third parties" is covered. Coverage for property damage to the member's own property is also covered. Any existing member insurance (in this case, auto insurance) would be primary. Fire damage coverage is limited to \$1,000,000 per occurrence.

**10. Are we covered if a rocket hits someone who is not part of the launch?** Yes. The individual NAR member has coverage over and above any existing personal liability coverage (e.g., homeowner's policy). The NAR, and the applicable NAR Section, are also covered. Flights by non-NAR members are not covered.

**11. Can NAR offer a rider to allow the individual rocketeer to purchase extra coverage above the policy limits?** Currently the NAR's insurance provider has no provisions for additional coverage.

**12. Does my insurance expiration date match my membership expiration date?** All NAR members are additional insureds on the NAR policy as long as they have paid their membership dues and are entered on the NAR membership list.

**13. Does my insurance (as a teacher Senior member) cover my students too?** Only if they are also members of the NAR. If your students are not members, then your NAR member insurance does not cover them when they fly rockets.

**14. Will the NAR insurance cover claims related to use of non-certified motors?** No. NAR insurance is null and void if the accident involves a Safety Code violation. Use of uncertified motors is prohibited by the NAR Safety Codes.

**15. Who is protected under NAR Section (club) insurance?** This insurance protects the group, corporately, against liability claims during activities sponsored by the group. If the group is sued as a result of a rocket accident, insurance would pay for the expenses resulting from the lawsuit, plus damages awarded. Individual members may still be held liable for their own actions. TARC teams may if they wish fill out the NAR section charter

application and become chartered NAR sections as long as they have the required number of NAR members on the team.

**16. Any difference between individual and Section (club) insurance as far as what stuff it can cover?** No. Policy limits and coverage are the same for individuals, Sections, and site owners.

**17. What about the site owner insurance we can get as a Team? What does it cover?** The optional additional coverage (available for \$15 from NAR HQ) for the site owner is to defend him from third-party liability claims brought against him as the owner of the property, due to covered activities of the Section or of TARC team members who belong to the NAR. This coverage can only be obtained by chartered NAR sections, or by registered TARC teams whose adult supervisor and at least three of the student team members are members of the NAR. The form for ordering this coverage is on the NAR website at <http://www.nar.org/pdf/TAInsForm.pdf>

**18. How do I convince the landowner that this is real insurance backed by a reputable provider, so that he'll let me launch? What benefits can I show him?** The NAR Section or a TARC team can deliver an insurance certificate listing the landowner as an additional insured regarding NAR activities on their site. This certificate will provide the site owner with policy facts such as limits, effective dates, and the insurance company

providing the coverage. We recommend keeping one copy on file with your records, and providing another copy to your landowner. Your landowner can then contact our insurance agency directly with any questions.


**19. A rocket launched is responsible for seriously injuring a human being. The loss of income and medical damages comes to several millions. The NAR covers up to \$5 million. The landowner's personal policy does not fully cover the difference. What happens to the owner?** The landowner is the least likely party to be found negligent and legally liable for injuries from a rocket. If, however, a court found the owner legally liable for the loss, and his NAR insurance and all other insurance he has becomes exhausted, he would be personally liable for the balance.

**20. When an team member who belongs to the NAR is flying, does the team's supervising teacher/adult need to be present?** There is no requirement for an adult to be present at a launch. However, we strongly encourage a responsible adult to attend all flying events. In all cases, we strongly recommend that a Range Safety Officer be appointed and on duty at all times.

**21. Is there anything my TARC team can do to minimize the risk of paying a judgment?** Yes! Follow the Safety Codes. Use only certified motors at your launches. Make sure there is a designated and safety-conscious Range Safety Officer (RSO)

supervising your launches at all times. If in doubt, err on the side of safety.

**22. Can I contact someone if I have questions about insurance?** NAR members (only) may call or email [bob.blomster@japrice.com](mailto:bob.blomster@japrice.com) at the J. A. Price Agency: (952) 944-8790, Ext. 127. Bob is there to address and help with your NAR insurance issues only.

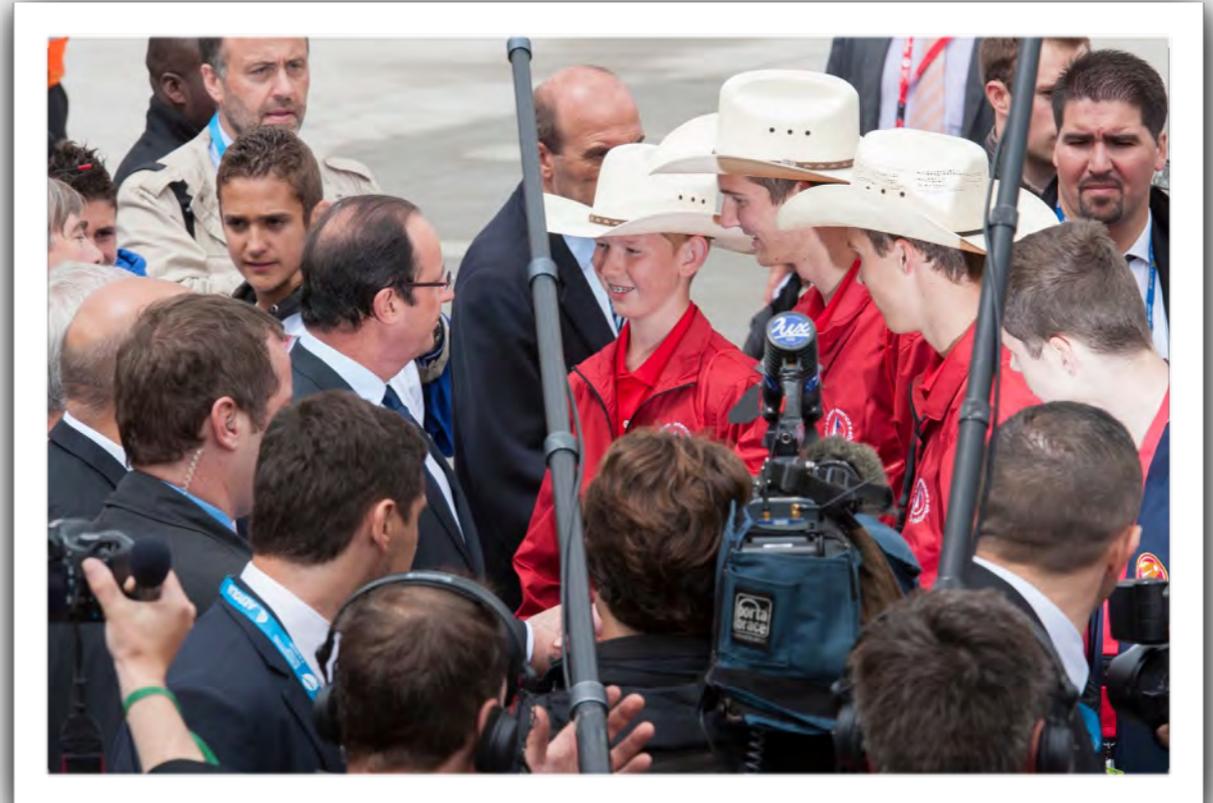

*TARC 2013 Champions Mark Janecka, Matt Janecka, and Daniel Kelton greet French president François Hollande after their victory at the International Rocketry Challenge, held at the 2013 Paris Air Show.*

# Past TARC Champions



Contest Year	Teams Entering	States Represented	Teams Submitting Scores	States in Finals	Altitude Target	Egg Count	Duration Target	Other Requirements	TARC Champion
2003	873	50	275		1,500 ft.	2	N/A	2 stages	Boonsboro HS, Boonsboro, MD
2004	619	50	201		1,250 ft.	2	N/A	2 stages	Penn Manor HS, Millersville, PA
2005	712	49	268		N/A	1 or 2	60 sec.	1 or 2 stages, bonus for 2 eggs and/or 2 stages	Dakota Co. 4-H, Farmington, MN
2006	678	47	390		800 ft.	1	45 sec.		Statesville Christian School, Statesville, NC
2007	690	48	313		850 ft.	1	45 sec.		Newark Memorial HS, Newark, CA
2008	643	43	340	32	750 ft.	2	45 sec.		Enloe HS Team 2, Raleigh, NC
2009	653	43	382	30	750 ft.	1	45 sec.	Egg must lay horizontally	Madison West HS Team 3, Madison, WI
2010	666	45			825 ft.	1	45 sec.	Streamer recovery	Penn Manor HS Team 1, Millersville, PA
2011	604	48	338	34	750 ft.	1	40-45 sec.	Portion of rocket containing egg must utilize 15" parachute	Rockwall-Heath HS Team i, Rockwall, TX
2012	678	48	409	29	800 ft.	2	43-47 sec.	Rocket limited to 650g maximum lift-off weight; total motor impulse limited to 80ns	Madison West HS Team 1, Madison, WI
2013	735	44	470	29	750 ft.	1	48-50 sec.	Portion of rocket containing egg must utilize 15" parachute; rocket limited to 650g maximum lift-off weight; total motor impulse limited to 80ns; egg must lay horizontally; minimum airframe diameter of 60mm	Georgetown 4H, Georgetown, TX
2014	712	48	415	25	825 ft.	2	48-50 sec.	All portions of rocket must remain connected and descend under two identically-sized parachutes.	Creekview HS. Canton, GA
2015	695	48	459	28	800 ft.	2	46-48 sec.	Top 24 teams required to make second flight with 775 ft. target altitude.	Russellville City School, Russellville, AL

# America's Safe, Educational Aerospace Hobby

**WHAT IS SPORT ROCKETRY?** Sport rocketry is aerospace engineering in miniature. This popular hobby and educational tool was founded in 1957 to provide a safe and inexpensive way for young people to learn the principles of rocket flight. It has grown since then to a worldwide hobby with over 12 million flights per year, used in 25,000 schools around the U.S.. Its safety record is extraordinarily good, especially compared to most other outdoor activities. It is recognized and permitted under Federal and all 50 states' laws and regulations, and its safe and inexpensive products are available in toy and hobby stores nationwide. Sport rocketry has inspired two generations of America's young people to pursue careers in technology.

**WHAT IS A SPORT ROCKET?** A sport rocket is a reusable, lightweight, non-metallic flight vehicle that is propelled vertically by an electrically-ignited, commercially-made, nationally-certified, and non-explosive solid fuel rocket motor. For safety reasons no rocket hobbyist is ever required or allowed to mix or load chemicals or raw propellant; all sport rocket motors are bought pre-made. Sport rockets are always designed and built to be returned safely and gently to the ground with a recovery

system such as a parachute. They are always designed to be recovered and flown many times, with the motor being replaced between flights. Sport rockets come in two size classes: MODEL rockets, which are under 3.3 pounds in weight, have less than 4.4 ounces of propellant, and are generally available to consumers of all ages; and HIGH-POWER rockets, which are larger, use motors larger than "G" power, and are available only to adults.

**ARE THESE ROCKETS LEGAL?** Model rockets are legal under the laws and regulations of all 50 states and the Federal government, although some local jurisdictions may have ordinances restricting their use. Model rockets are regulated by the National Fire Protection Association (NFPA) Code 1122, which is adopted as law in most states. They are specifically exempted from Federal Aviation Administration (FAA) air traffic control by Part 101.1 of Federal Aviation Regulations (14 CFR 101.1) and may be flown anywhere without FAA clearance. They are permitted for sale to children by the Consumer Product Safety Commission under their regulations (16 CFR 1500.85 (a) (8)). They are permitted for shipping (with appropriate packaging

and labeling) by the Department of Transportation and U.S. Postal Service. They are not subject to regulation or user licensing by the Bureau of Alcohol, Tobacco, Firearms & Explosives (BATFE). They are endorsed and used by the Boy Scouts, 4-H Clubs, the Civil Air Patrol, and NASA. High power rockets are regulated under NFPA Code 1127. Because of their size and power they are not available to people younger than age 18. Their flights are subject to FAA air traffic regulations, and purchase of the larger motors for these rockets generally requires user certification by a national rocketry organization, plus BATFE licensing in some cases. Despite these greater legal restrictions, high power rockets are also very popular. They also have an outstanding safety record.

**IS THIS HOBBY SAFE?** In well over 500 million flights since the founding of the hobby, there has never been a death caused by the flight of a sport rocket. Injuries are rare and generally minor. They are almost always the result of failure to follow the basic safety precautions and instructions provided by the manufacturers. Sport rocketry's record shows that it is safer than almost any sport or other outdoor physical activity. The hobby operates under the simple and easy-to-follow Model Rocket and High-Power Rocket Safety Codes of the National Association of Rocketry, which have been fine-tuned by professional engineers and public safety officials over the past 50 years to maximize user and spectator safety. The foundations of these Safety Codes are that sport rockets must be electrically ignited from a safe distance

with advance warning to all those nearby, must have recovery systems, must be flown vertically in a suitably-sized field with no aircraft in the vicinity, and must never be aimed at a target or used to carry a pyrotechnic payload. All sport rocket motors are subjected to extensive safety and reliability certification testing to strict NFPA standards by the National Association of Rocketry or other national organizations before they are allowed to be sold in the U.S..

**AREN'T THESE ROCKETS FIREWORKS?** All Federal and state legal codes recognize sport rockets as different from fireworks. Fireworks are single-use recreational products designed solely to produce noise, smoke, or visual effect. They have few of the designed-in safety features or pre-consumer national safety testing of a reusable sport rocket, and none of the sport rocket's educational value. Fireworks are fuse-lit, an inherently dangerous ignition method that is specifically forbidden in the hobby of sport rocketry. Sport rockets are prohibited from carrying any form of pyrotechnic payload; their purpose is to demonstrate flight principles or carry educational payloads, not blow up, make noise, or emit a shower of sparks.

**WHO ARE THE EXPERTS?** The oldest and largest organization of sport rocketeers in the U.S. is the National Association of Rocketry (NAR). This non-profit organization represents the hobby to public safety officials and federal agencies, and plays a key role in maintaining the safety of the hobby through rocket engine

certification testing and safety code development. The NAR also publishes Sport Rocketry magazine, runs national sport rocketry events and competitions, and offers liability insurance coverage for sport rocketeers and launch site owners. You may reach the NAR at: National Association of Rocketry, Post Office Box 407, Marion, IA 52302

<http://www.nar.org>

You may purchase copies of the NFPA Codes 1122 or 1127 regulating sport rocketry from: National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02269-9101

<http://www.nfpa.org>

*A printable PDF version of this section may be found on the [NAR website](#).*



# Team America Mentor Volunteers

TARC The role of the "mentor" is to provide advice to a Team America team that needs local expertise in how to build and fly complex model rockets, or that needs advice on launch sites, rocketry vendors, or other general aspects of the hobby. Mentors may provide advice by phone, e-mail, or (at their discretion) in person. They are purely volunteers doing on their own time and expense; they are not expected to travel long distances to a launch, or to drop everything they are doing in order to provide advice or observe TARC qualification flights on short notice at the last minute before the March qualification flight deadline.

Teams are not required to have mentors. It is not necessary for mentors to provide advice in person; any mentor may be contacted by any team using phone or e-mail, regardless of state.

In accordance with the rules of the Team America event, neither mentors nor any other adult may participate in the actual design or construction of a rocket used in the competition. They may (if they wish) serve as the official "NAR Senior Member Observer" of Team America qualification flights.

Many of the mentors (but not all) are members of local NAR clubs (sections) with launch facilities, and may be able to assist with locating a means or place for a Team America team to fly. If you need a mentor and none is listed below in your area, consult the [list of NAR sections](#) on the NAR website and contact the nearest section; they will very likely be able to find someone to help.

A [list of NAR members](#) who may be available to serve as a mentor to your Team America Rocketry Challenge team may be found on the NAR website.



---

# Team America Rocketry Challenge

## 2016 Team Handbook

Aerospace Industries Association - National Association of Rocketry



© 2015 Aerospace Industries Association and the National Association of Rocketry

All Rights Reserved

Produced by the volunteer members of the National Association of Rocketry.

Created using iBooks Author 2.3.

Version 16.0.3 August 13, 2015